



△ SPECIFICATION





Housing:PC(UL94V-2)
 Contact:Phosphor Bronze
 Gold Plated 3u" On Contact Area,
 Gold Flash On Other Area,Over Nickel
 Available For 24 Or 26 AWG Wire
 RoHS Compliant

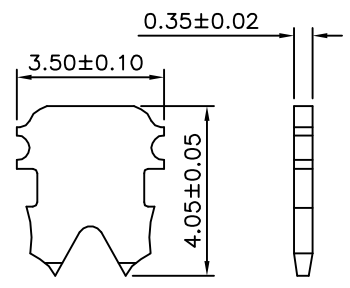

△ 2 Prongs For Stranded Wire

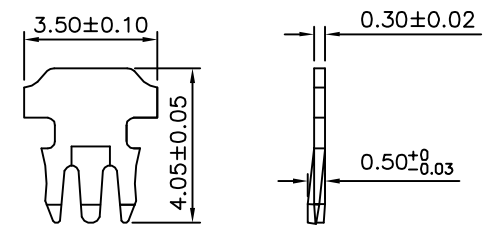

△ 3 Prongs For Solid Wire

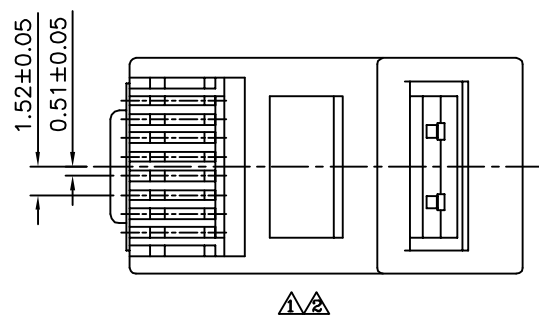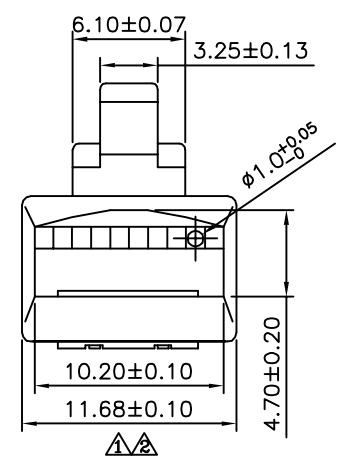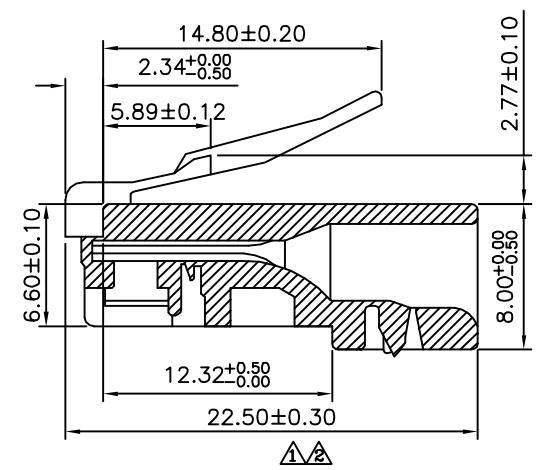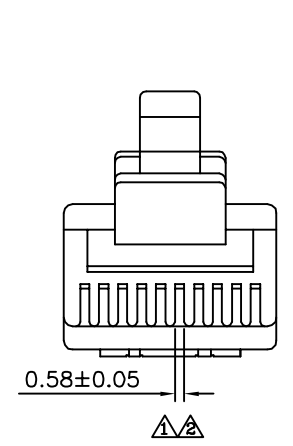

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
04821		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	05/25/2015
△ A1		Modify Data	HZF	04/26/2012
△ A0		NEW RELEASE		