

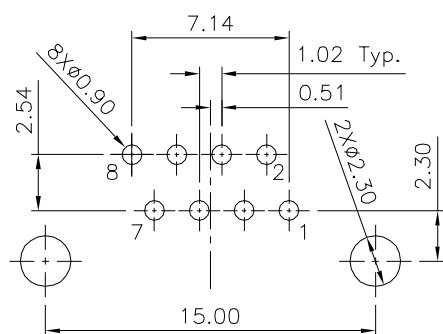
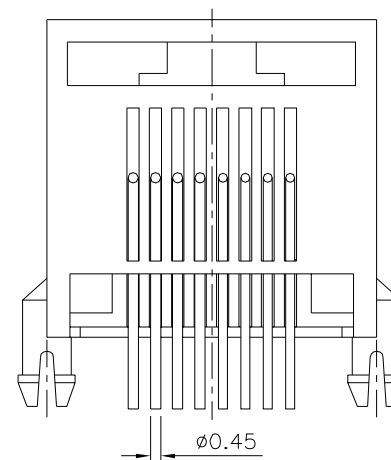
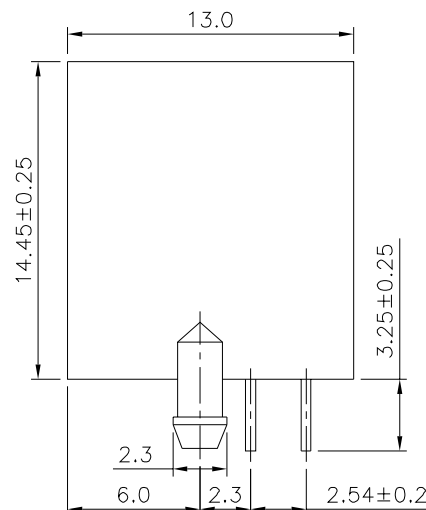


3. SPECIFICATION

Current Rating: 1.5A Max.
 Voltage Rating: 150V AC Max.
 Operating Temperature: -40°C ~ +85°C
 Relative Humidity: 70% ± 10% RH
 Insulation Resistance: 500 Megaohms Min. Initial
 At 500V DC
 Contact Resistance: 20 Milliohms Max. Initial
 30 Milliohms Max. Final
 Durability: 750 Cycles
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz, 1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz, 1 Minute Between
 Shield And Contacts
 Housing: PBT+G.F.(UL94V-0), Gray
 Contacts: Phosphor Bronze
 Gold Plated 6u" Over All, Over Nickel
 Cavity Conforms To FCC Rules And Regulations
 Part 68, Subpart F.
 RoHS Compliant

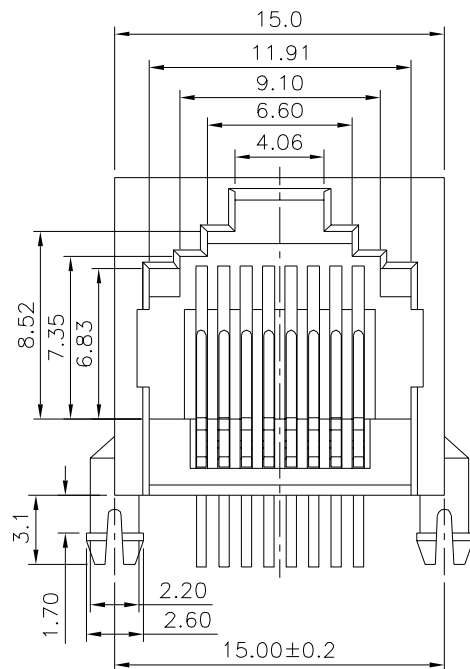

Recommended P.C.B. Layout
 Recommended P.C.B. Thickness: 1.6mm
 Tolerance: ±0.05 (Top View)

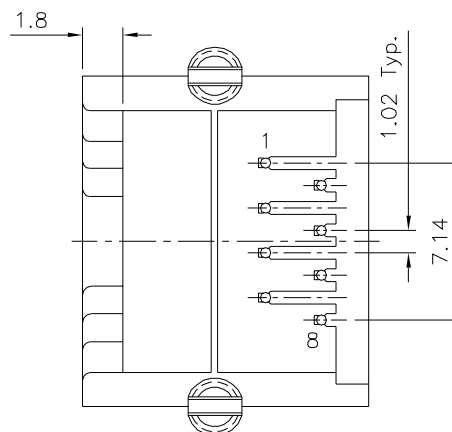

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 2/1

04876

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
3	B3	Modify Data	HZF	03/03/2016
2	B2	Modify Data	HZF	01/19/2016
1	B1	Modify Data	HZF	03/19/2012
0	B0	NEW RELEASE	HZF	04/22/2009