



△△ SPECIFICATION


Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature:-40°C~85°C
 Housing:PBT+G.F.(UL94V-0),Black
 Contact:Phosphor Bronze
 Gold Plated 06u" On Contact Area,
 Gold Flash On Other Area,Over Nickel
 Cavity Confirms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

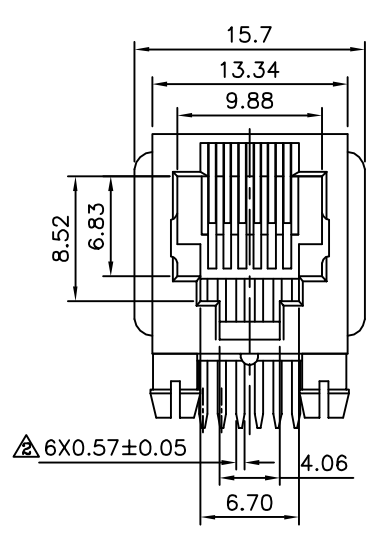


△

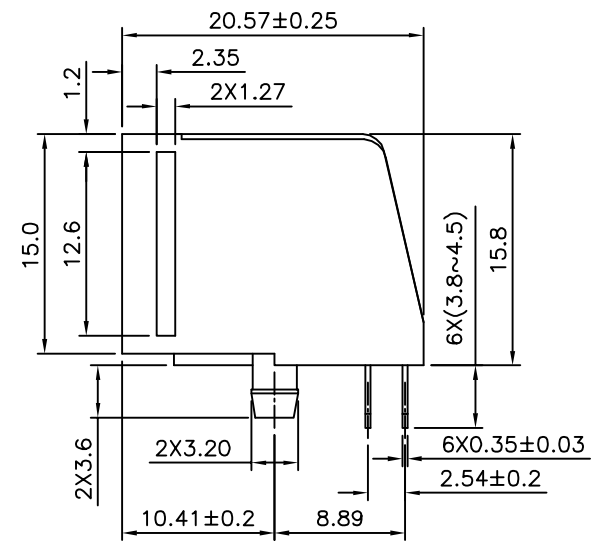


△




△



△ Detail B

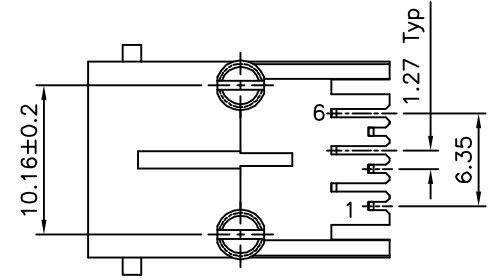

△

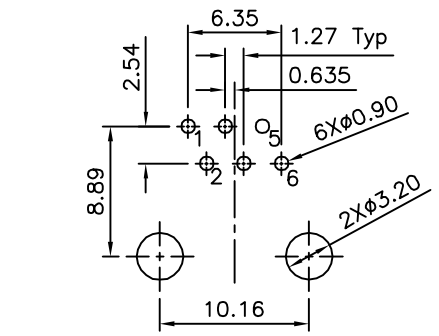

△ Recommended P.C.B. Layout(Top View)
 PCB Thickness:1.6mm Tolerance±0.05

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.13 .XXX ±0.05
04905		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	08/11/2015
△	A1	Modify Data	HZF	11/30/2012
△	A0	NEW RELEASE	HZF	01/06/2007