



△

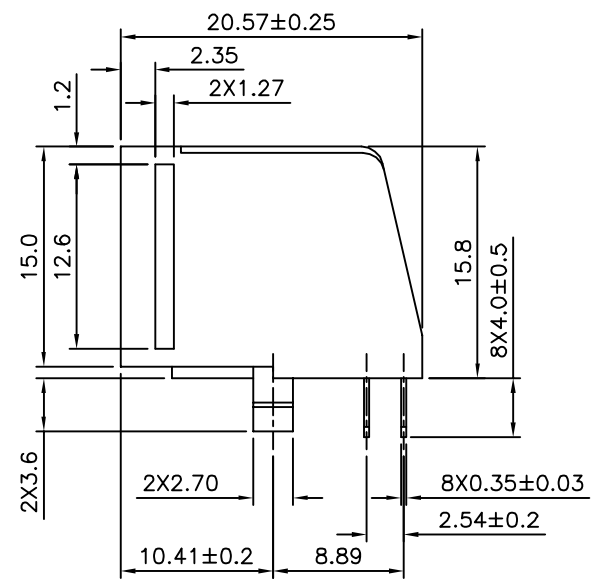


△




△

△△ SPECIFICATION


Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature:-40°C~85°C
 Housing:PBT+G.F.(UL94V-0),Black
 Contacts:Phosphor Bronze
 Gold Plated 6u" On Contact Area,Gold
 Flash On Other Area,Over Nickel
 Cavity Confirms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant



△ Detail B

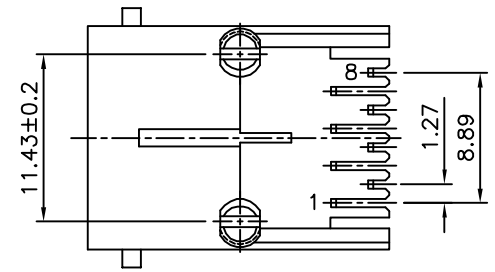

△

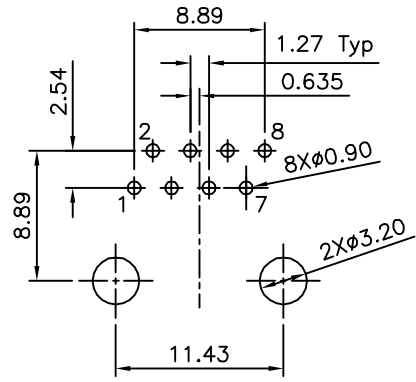

△ Recommended P.C.B. Layout
 Recommended P.C.B. Thickness:1.6mm
 Tolerance±0.05 (Top View)

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.13 .XXX ±0.05
04906		EMILY		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Spec.	HZF	08/10/2015
△	A2	Modify Data	HZF	08/25/2014
△	A1	Modify Data	HZF	11/23/2010
△	A0	NEW RELEASE		