


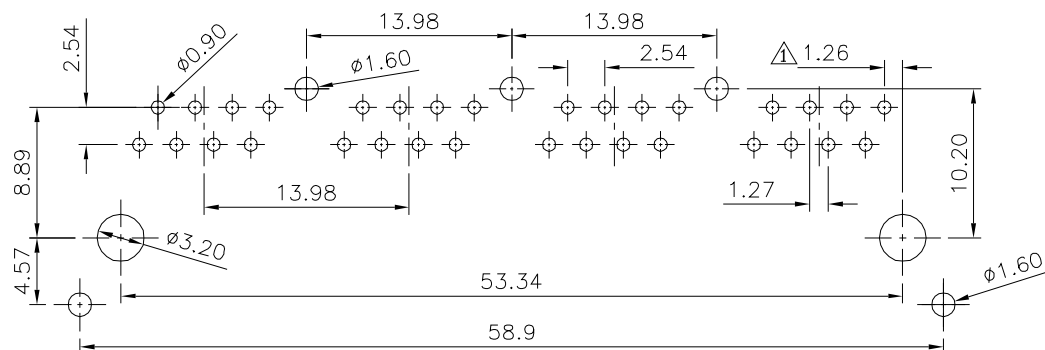


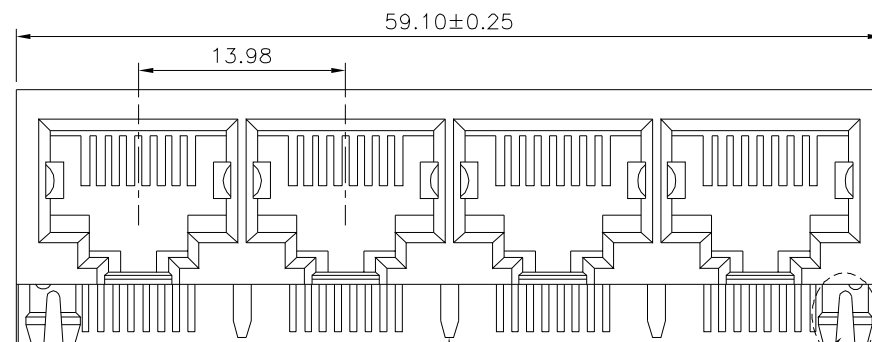

Recommended P.C.B. Layout



Metal Tabs

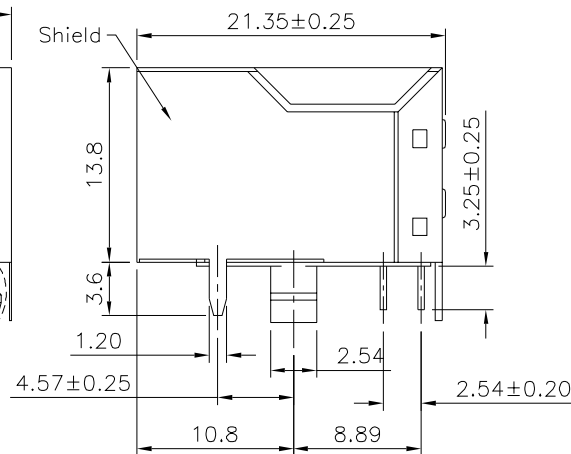

Detail X

△△ SPECIFICATION

Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature: -40°C~+85°C
Relative Humidity: 70% ±10%RH
Insulation Resistance:500 Megaohms Min. Initial
At 500V DC
Contact Resistance:20 Milliohms Max. Initial
30 Milliohms Max. Final
Durability:750 Cycles
Dielectric Withstanding Voltage:
1000V RMS. At 60Hz,1 Minute Between
Adjacent Contacts
1500V RMS. At 60Hz,1 Minute Between
Shield And Contacts
Housing:PBT+G.F.(UL94V-0),Black
Contacts:Phosphor Bronze $\phi 0.45\text{mm}$
Gold Plated 6u" Over All,Over Nickel
Shield:Brass,Nickel Plated
Cavity Conforms To FCC Rules And
Regulations Part 68,Subpart F.
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

04926

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ±0.25
△ .XX ±0.13
△ .XXX ±0.05
ANG. ±0.5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△2	B2	Modify Data	HZF	08/30/2017
△1	B1	Modify Data	HZF	12/21/2012
△0	B0	NEW RELEASE	BECKY	12/23/2005