
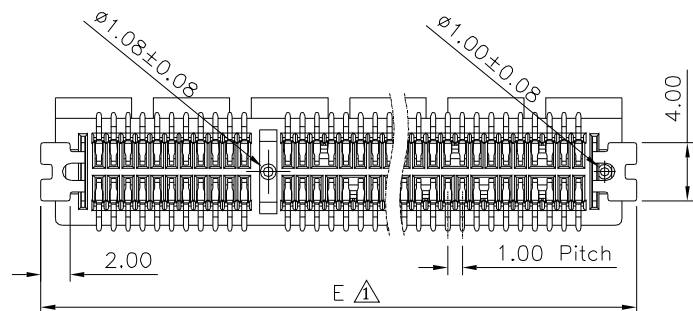
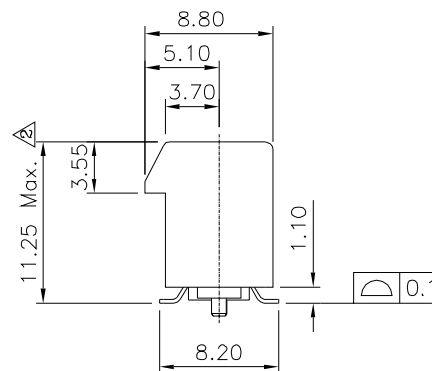
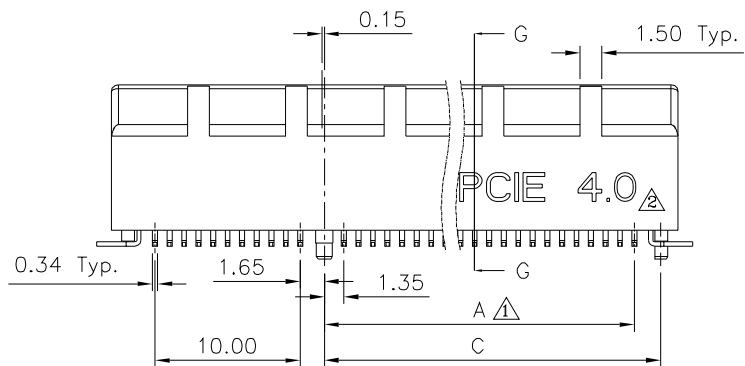



△△ SPECIFICATION

Current Rating:1.1A
 Voltage Rating:50V AC RMS
 Contact Resistance:30 Milliohms Max.(Initial)
 After Test:ΔR=20 Milliohm Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC/Minute
 Withstanding Voltage:500V AC For 1 Minute
 Operation Temperature:-40°C~+85°C
 Insulator:PA9T,UL94V-0,Black
 Contact:Phosphor Bronze
 Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Holddown:Brass,Tin Plated Over Nickel
 RoHS Compliant

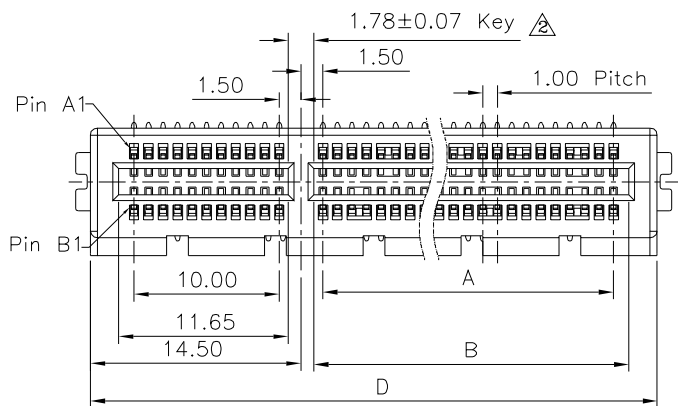

△	Pin	A±0.20	B ^{+0.20} _{-0.08}	C±0.25	D±0.25	E±0.3
	36	6	7.65	9.15	25	27
	64	20	21.65	23.15	39	41
	98	37	38.65	40.15	56	58
	164	70	71.65	73.15	89	91

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.





DRAWING No. 04929

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY WSS

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.40
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

SCALE NONE REV. B2 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△B2		Modify Data	HZF	08/01/2024
△B1		Modify Data	HZF	03/10/2022
△B0		NEW RELEASE	HZF	11/10/2020

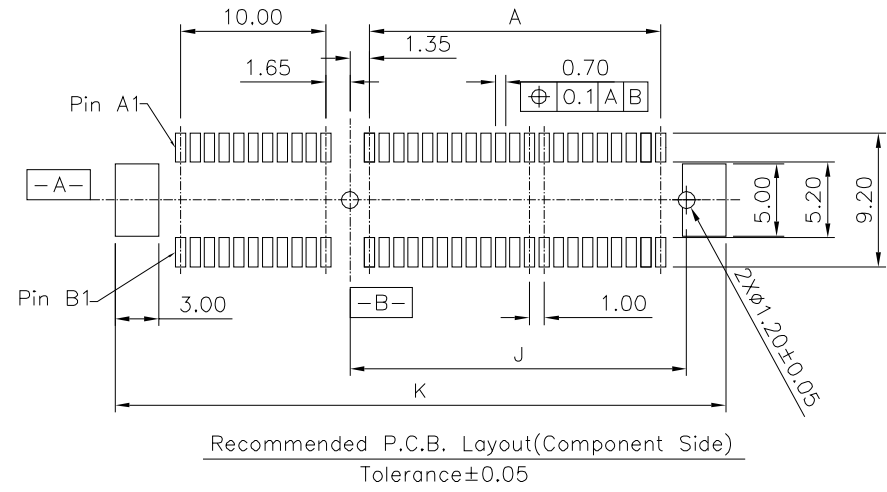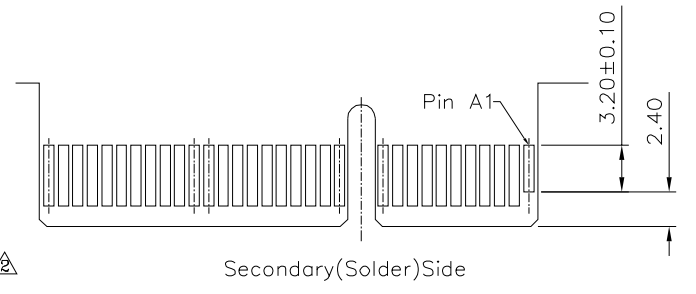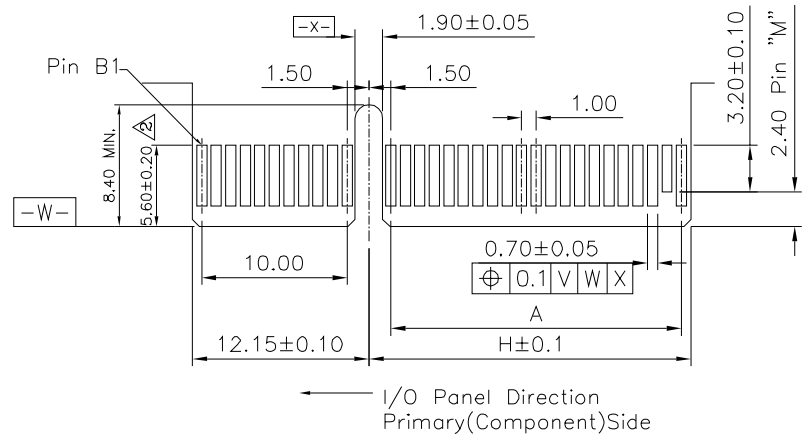

Pin	A	H	J	K	"M"
36	6	8.15	9.15	28.0	B17
64	20	22.15	23.15	42.0	B31
98	37	39.15	40.15	59.0	B48
164	70	72.15	73.15	92.0	B81

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 04929

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY WSS

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.25

SCALE NONE REV. B2 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	08/01/2024
△	B1	Modify Data	HZF	03/10/2022
△	B0	NEW RELEASE	HZF	11/10/2020