
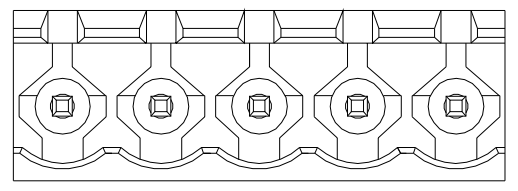
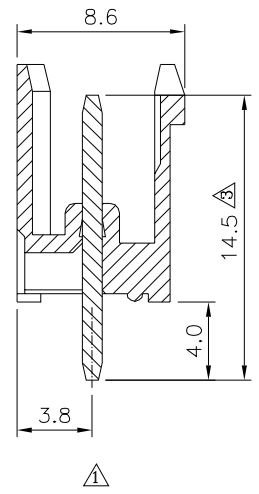


Recommended P.C.B. Layout

**△△ SPECIFICATION**

Voltage Rating:300V AC  
 Current Rating:16A  
 Withstanding Voltage:2500V AC(1 Minute)  
 Using Temperature Range:-40°C~+105°C  
 Solder Pin:Copper Alloy,Tin Plated  
 Insulator Body:Polyamide+G.F.(UL94V-0),Green  
 RoHS Compliant

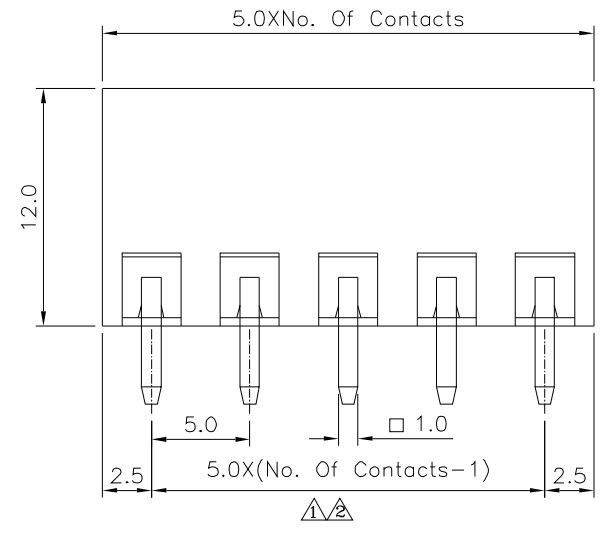

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △△  
**05313**

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ X. ±0.50  
 △.X ±0.30  
 △.XX ±0.20  
 ANG. ±1°

SCALE NONE

REV. A3



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	10/30/2023
△2	A2	Modify Data	HZF	10/24/2015
△1	A1	Modify Data	HZF	08/08/2012
△0	A0	NEW RELEASE	HZF	08/12/2009