
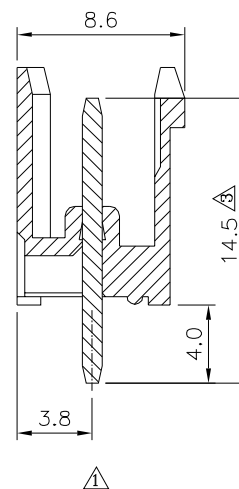
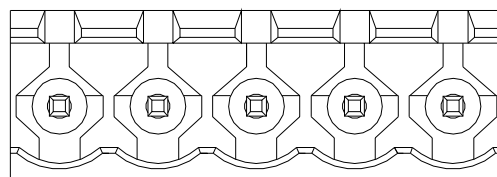


Recommended P.C.B. Layout

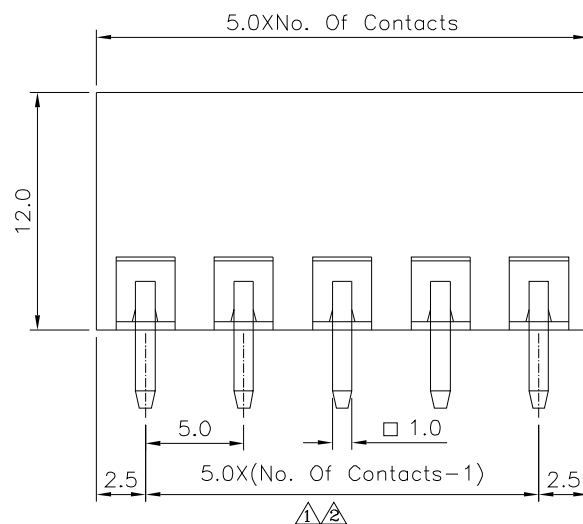

SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13

05324

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

TOLERANCES ARE

$\triangle 2$	X.	± 0.50
	.X	± 0.30
	.XX	± 0.20
	ANG.	$\pm 1^\circ$

UNIT	mm
------	----



Δ	ΔZ

3	Modify Data
---	-------------

1175

	10/30/2023
--	------------

$\triangle$	
$\triangle$	$\triangle 2$

2	Modify Data
---	-------------

H7F

10/24/2015

1	A1
---	----

Modify Data

H7F

08/08/2012

	A0
--	----

RELEASE

H7F

08/12/2009
