
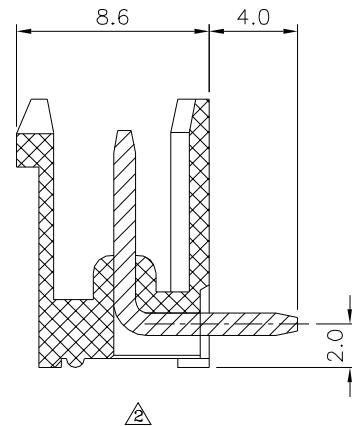
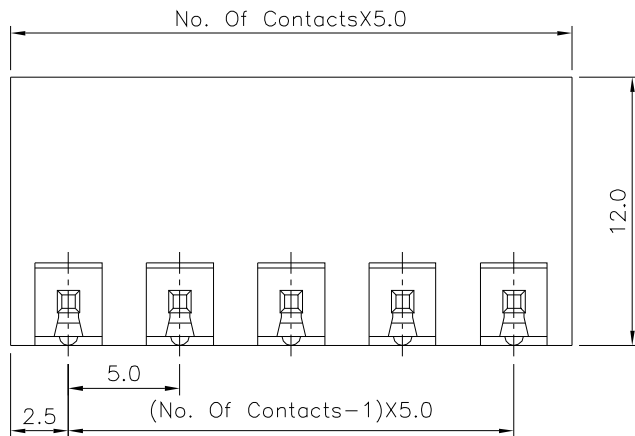


Recommended P.C.B. Layout

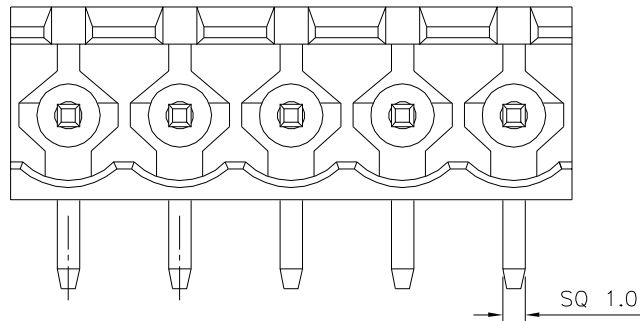

△△△△ SPECIFICATION
 Current Rating:16A
 Voltage Rating:300V AC
 Withstand Voltage:2500V AC/Minute
 Using Temperature Range:-40°C~+105°C
 Insulator:Polyamide+G.F.(UL94V-0),Green
 Solder Pin:Copper Alloy,Tin Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. **05332**

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X° ±1°

SCALE NONE

REV. A3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	10/29/2024
△2	A2	Modify Data	HZF	03/07/2015
△1	A1	Modify Data	HZF	04/20/2011
△0	A0	NEW RELEASE	HZF	05/13/2009