

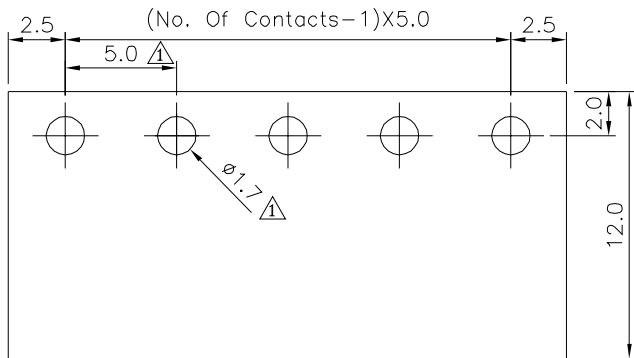
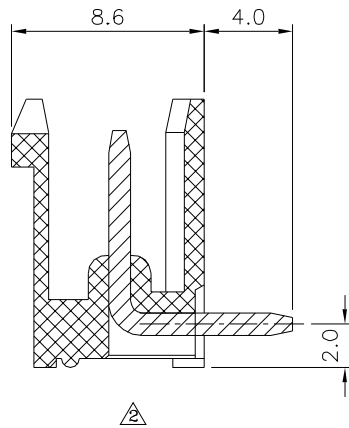


J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A

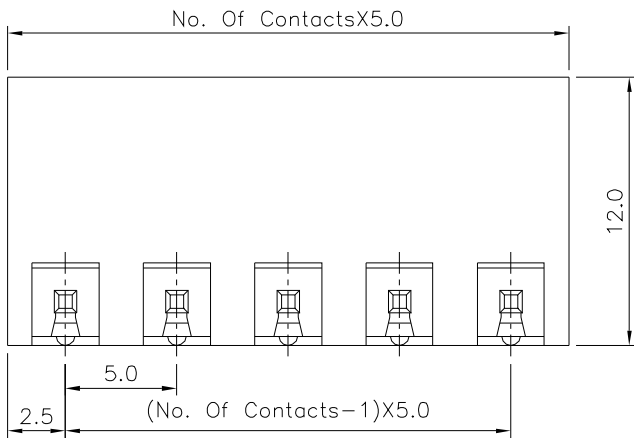

Recommended P.C.B. Layout

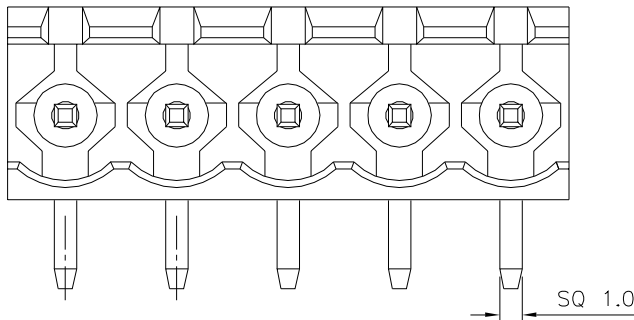

△△△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC/Minute
Using Temperature Range:-40°C~+105°C
Insulator:Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△△ 05339		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X°. ±1°	NO. REV. REVISIONS	CHK DATE		
		EMILY					△3 A3 Modify Data	HZF 10/29/2024
		CHECKED BY					△2 A2 Modify Data	HZF 03/07/2015
		HZF					△1 A1 Modify Data	HZF 04/20/2011
DRAWING BY		HAO		△0 A0 NEW RELEASE	HZF 05/13/2009			
SCALE	NONE	REV.	A3	UNIT mm				