



Recommended P.C.B. Layout

**△△ SPECIFICATION**


Voltage Rating:300V AC  
 Current Rating:10A/Way Max.  
 △ Withstanding Voltage:2500V AC(1 Minute) Test  
 Time=60s/1 Pcs  
 Operation Temperature:-40°C~+105°C  
 Solder Pin:Copper Alloy,Tin Plated  
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black  
 \* 02~24P Available~  
 RoHS Compliant

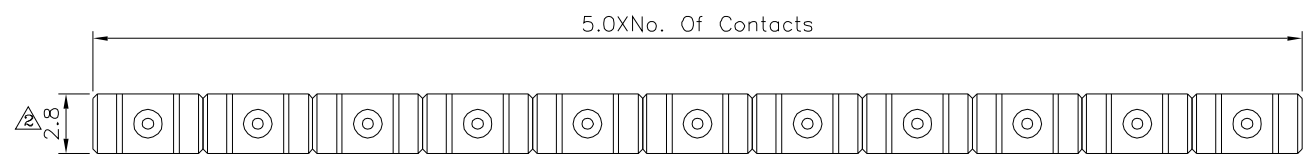

△

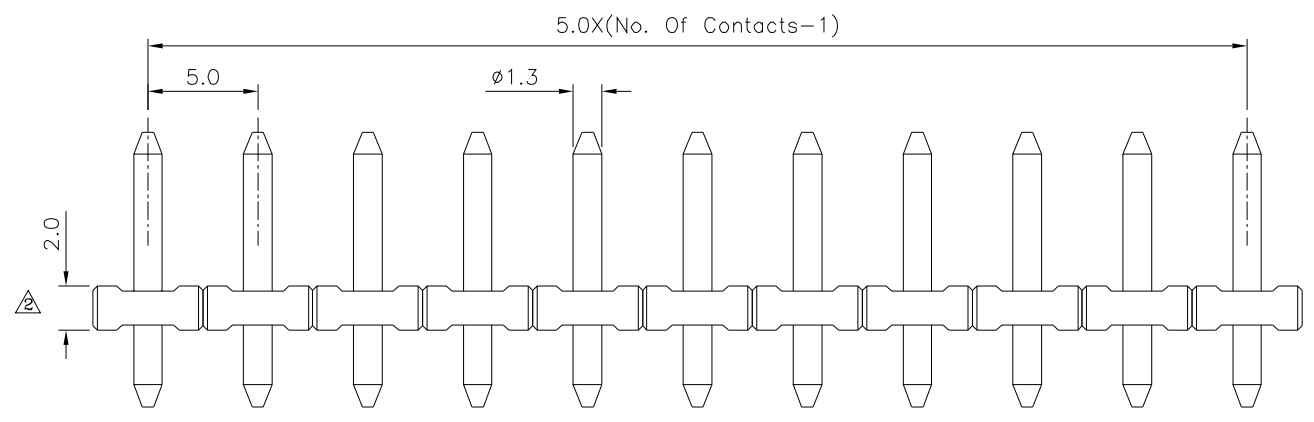

△



△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.50$ .X $\pm 0.30$ .XX $\pm 0.20$ ANG. $\pm 1^\circ$
05355		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A4	UNIT mm

△ A4	Modify Data	HZF	09/19/2023
△ A3	Modify Data	HZF	03/23/2017
△ A2	Modify Data	HZF	05/30/2013
△ A1	Modify Data	HZF	01/10/2011
△ A0	NEW RELEASE	HZF	04/29/2009
NO.REV.	REVISIONS	CHK	DATE