
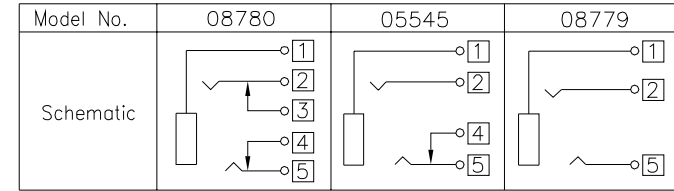
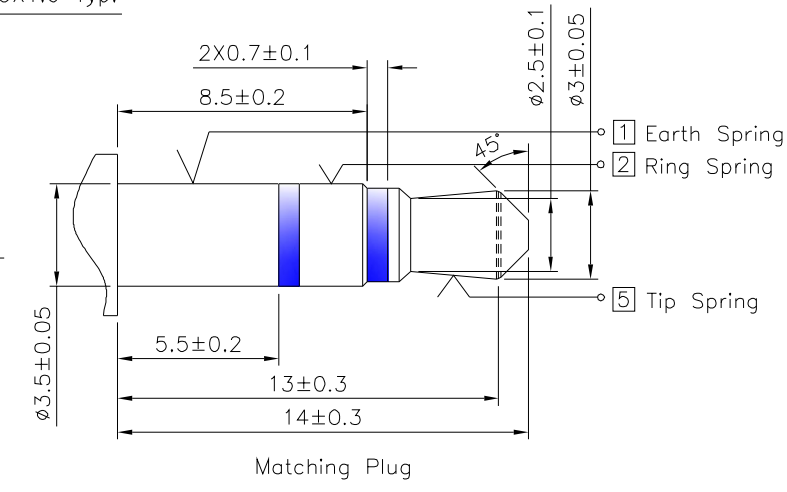
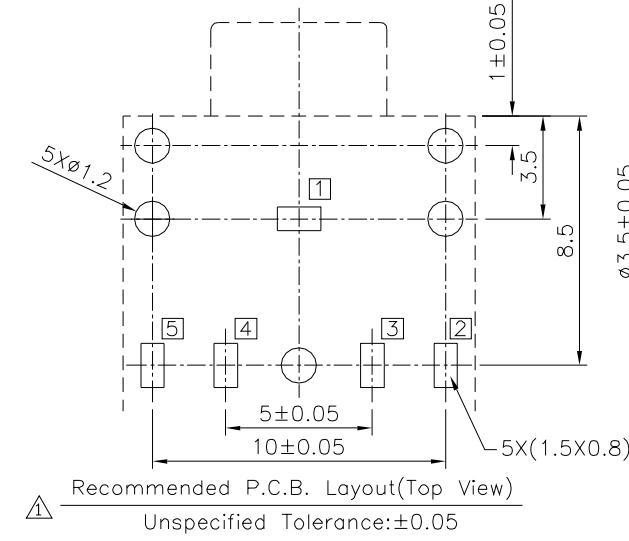


△ SPECIFICATION
 Rating:DC 30V,1A
 Contact Resistance:50 Milliohms Max.
 After Test:100 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.(DC 500V)
 After Test:50 Megaohms Min.
 Withstand Voltage:500V AC
 Operation Temperature Range:-20°C~+70°C
 RoHS Compliant

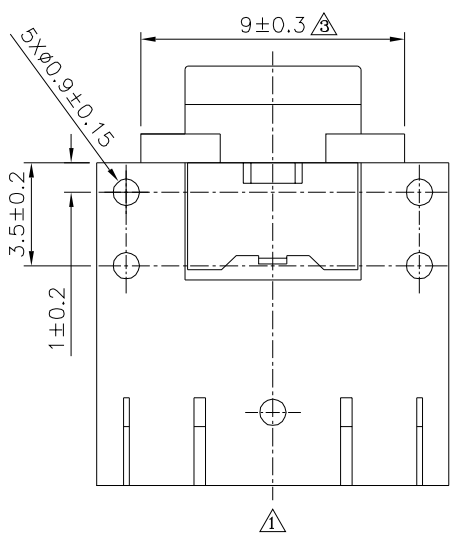

○:Item No. □:Terminal No.

⑦	Bushing	1	Brass	Nickel Plated
⑥	Tip Spring	5	Stainless Steel	Tin Plated
⑤	Shunt Terminal	4	Brass	Tin Plated
④	Shunt Terminal	3	Brass	Tin Plated
③	Ring Spring	2	Stainless Steel	Tin Plated
②	Earth Spring	1	Brass	Tin Plated
①	Housing	1	PBT(UL94V-0)	Black
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
05545
 SCALE NONE REV. C3

APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 X.* ±3.0* .XX ±0.30 .X.* ±1.5* .XXX ±0.15 .XX.* ±1.0*	△ C3	Modify Data	HZF	08/07/2023
CHECKED BY	HZF		△ C2	Modify Data	HZF	11/21/2017
DRAWING BY	CYP		△ C1	Modify Data	HZF	03/27/2015
UNIT	mm	△ C0	Modify Data	HZF	09/20/2012	
		△ C0	NEW RELEASE	HZF	09/20/2012	
NO.	REV.	REVISIONS		CHK	DATE	