

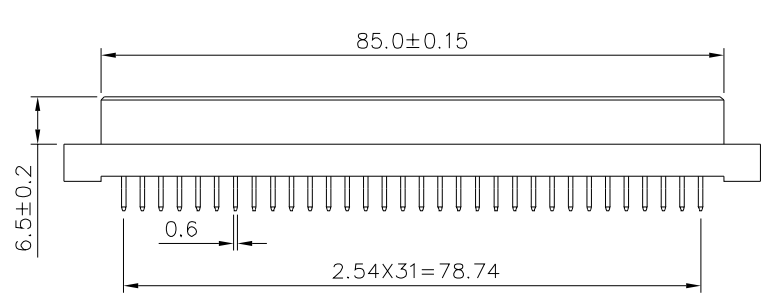
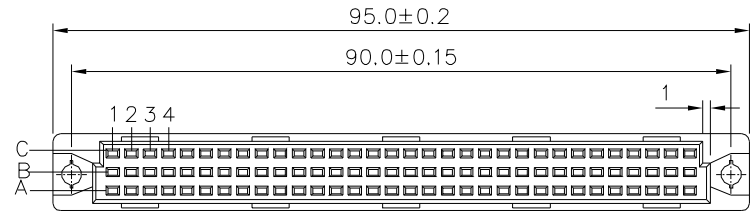


**△ SPECIFICATION**

Current Rating:2 Amp  
 Withstand Voltage:1000V AC For 1 Minute  
 Contact Resistance:30 Milliohms Max. At DC 100mA  
 Insulation Resistance:1000 Megaohms Min. At DC 500V  
 Operation Temperature:-55°C~+105°C  
 Housing:PBT+30%G.F.(UL94V-0),Gray  
 Contact:Brass,Gold Flash On Contact Area,  
 Tin Plated On Solder Tails,Over Nickel  
 RoHS Compliant

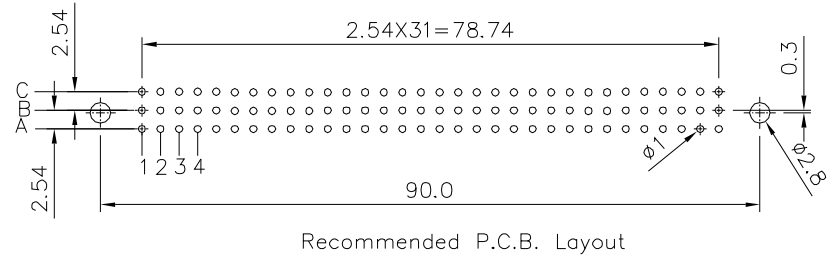

ITEM No.	Pin	Rows With Contacts	Contact Arrange
20406	96	A+B+C	
05620	64	A+C	
05618	32	A	
06992	48	A+B+C	
05619	32	A+C	

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 X.* ±3* .XX ±0.10 .X.* ±2* .XXX ±0.05 .XX.* ±1*
05620		MEI		
		CHECKED BY		
HZF		DRAWING BY		
CYP		B1		UNIT
SCALE	NONE	REV.	B1	mm

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	06/28/2023
△ B0		NEW RELEASE	HZF	03/14/2016