
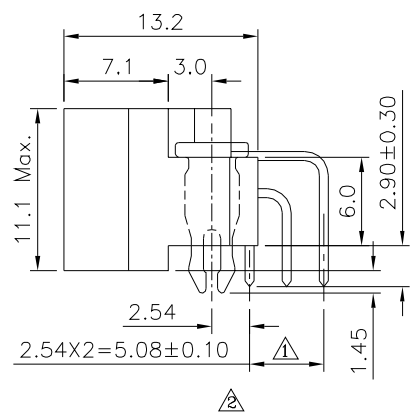
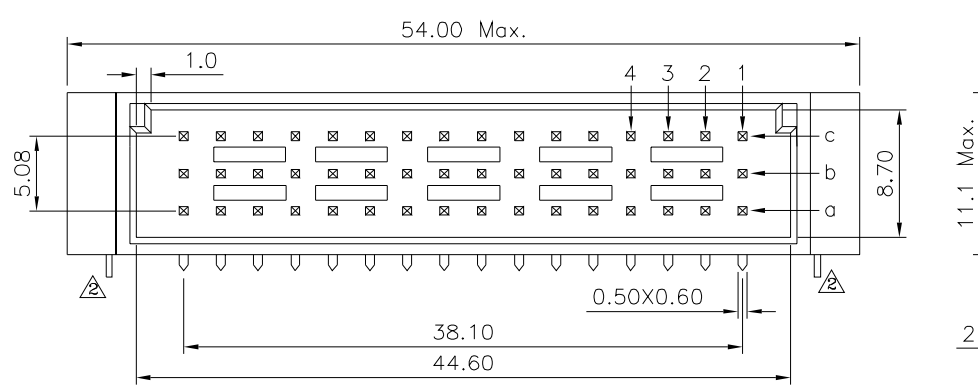


Recommended P.C.B. Layout

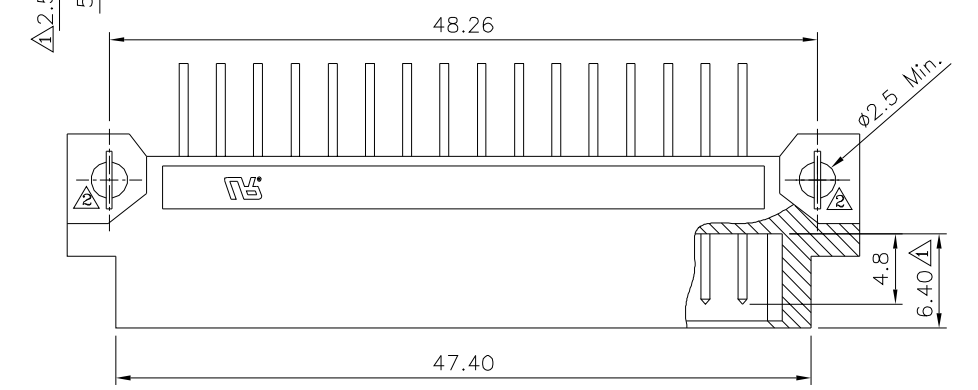

△ SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulator Resistance:1000 Megaohms Min. At DC 500V
 Contact Resistance:20 Milliohms Max. At DC 100mA
 Operating Temperature:-55°C~+125°C
 Housing:PBT(UL94V-0),Beige
 Contacts:Brass
 Boardlock:Phosphor Bronze,Tin Plated
 RoHS Compliant

- △ (1) 16:No. Of Poistion/Row,Full Pin
- △ (2) Boardlock Options(Standard W/O Boardlock)
- △ (3) Contact Finish Option:

Standard:Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 2:Gold Plated 10u" On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 3:Gold Plated 15u" On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 6:Gold Plated 30u" On Contact Area,
 Tin Plated On Solder Tails,Over Nickel

Pitch	Position	Rows With Contacts	Contact Arrange
2.54mm	16	a - -	
	32	a - c	
	48	a b c	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
05633

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.15

SCALE NONE

REV. B3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	08/21/2019
△2	B2	Modify Data	HZF	12/16/2013
△1	B1	Modify Data	HZF	05/30/2013
△0	B0	NEW RELEASE	HZF	08/22/2009