

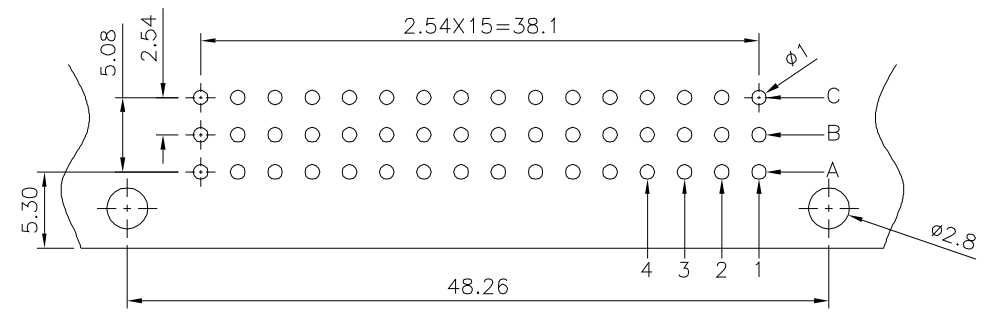
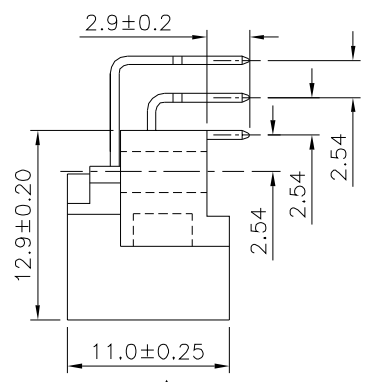


SPECIFICATION

Current Rating:2 Amp
 Withstanding Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At 100mA DC
 Insulation Resistance:1000 Megohms Min. At 500V DC
 Operating Temperature:-55°C~+105°C
 Housing:PBT+30%G.F.(UL94V-0)
 Contact:C2680-H,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

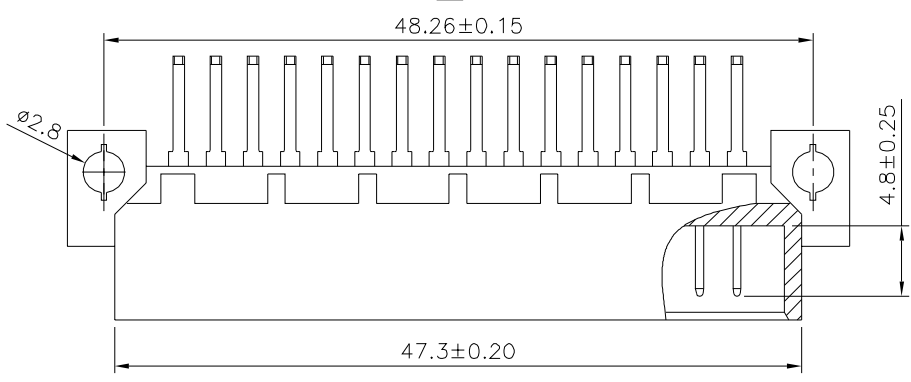

Recommended P.C.B. Layout

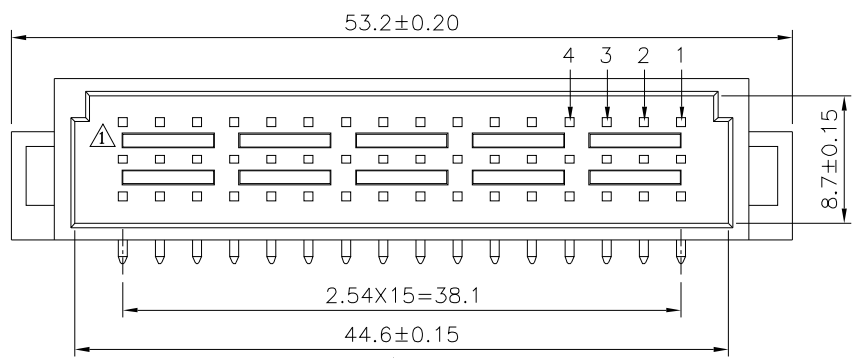

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 05634


APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.15 X.* ±3*
 .XX ±0.10 .X.* ±2*
 .XXX ±0.05 .XX* ±1*
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	03/29/2016
2	A2	Modify Data	HZF	06/06/2014
1	A1	Modify Data	LXX	09/04/2008
0	A0	NEW RELEASE	INGRID	06/19/2007

SCALE NONE

REV. A3



NO. REV. REVISIONS CHK DATE