
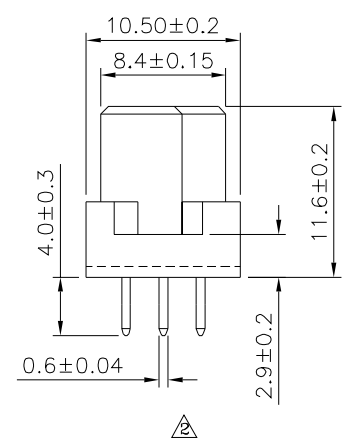
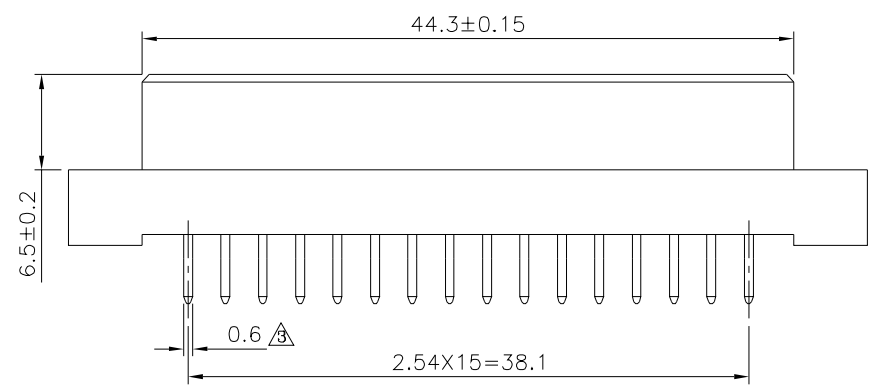


Recommended P.C.B. Layout

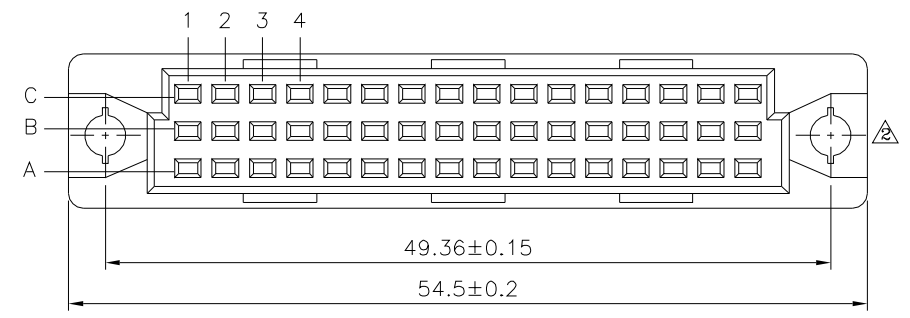

△△ SPECIFICATION
 Current Rating:2 Amp
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:30 Milliohms Max. At DC 100mA
 Insulation Resistance:1000 Megaohms Min. At DC 500V
 Operation Temperature:-55°C~+105°C
 Insulator&Cap:PBT+30%G.F.(UL94V-0),Gray
 Contact:C2680-H,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. **△△**
05642

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 SCALE NONE
 REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .x ±0.15 x.* ±3*
 .xx ±0.10 .x.* ±2*
 .xxx ±0.05 .xx.* ±1*
 UNIT mm

△ A4	Modify Data	HZF	03/29/2016
△ A3	Modify Data	HZF	01/16/2016
△ A2	Modify Data	HZF	07/15/2011
△ A1	Modify Data	BECKY	08/03/2006
△ A0	NEW RELEASE	BECKY	07/20/2004
NO.REV.	REVISIONS	CHK	DATE