



△ SPECIFICATION

Current Rating: 2 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulator Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 20 Milliohms Max. At DC 100mA
 Operating Temperature: -55°C ~ +125°C
 Housing: PBT+30%G.F. (UL94V-0)
 Contacts: Brass
 Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
 Lock: Copper Alloy, Tin Plated Over Nickel
 RoHS Compliant

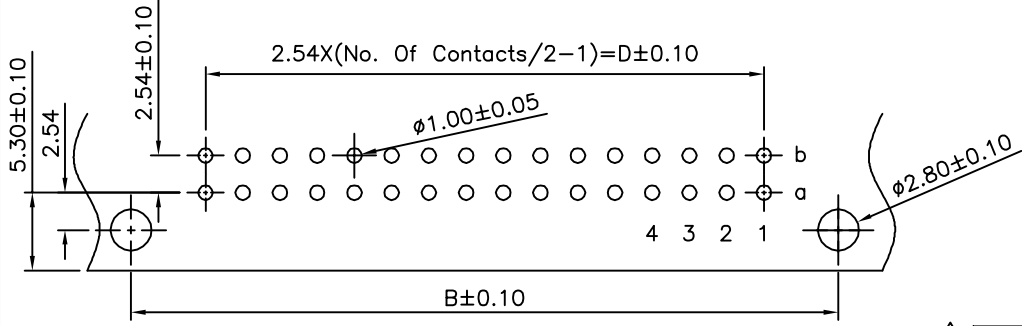


△ Recommended P.C.B. Layout


Pin	A	B	C	D	E
44/22	69.24	63.50	62.64	53.34	59.95
32/16	54.00	48.26	47.40	38.10	44.60

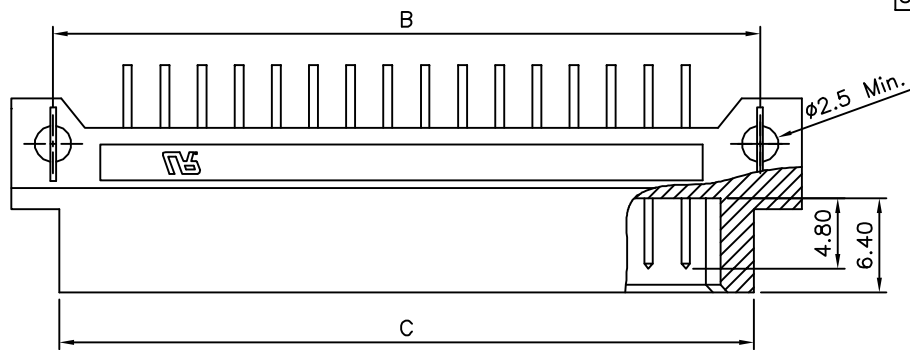

△

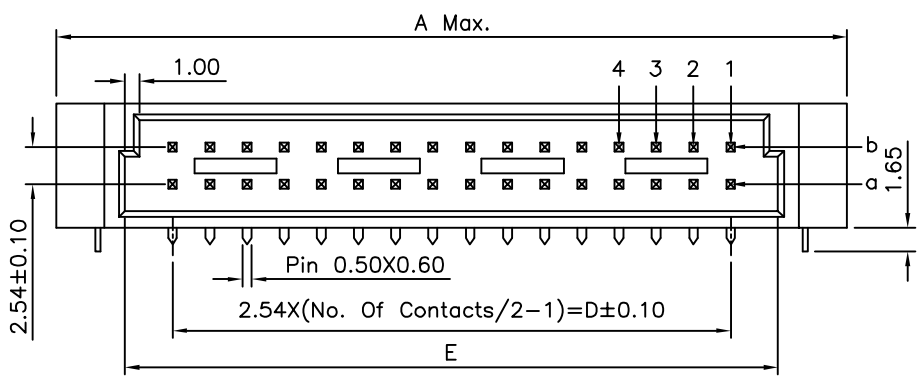

△

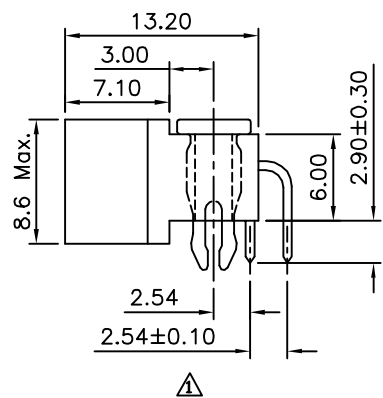

△

Item No.	Pitch	Position	Rows With Contacts	Contact Arrange
05646	2.54mm	32	a b	a b 4 3 2 1

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15
05646		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	09/25/2014
△ A0		NEW RELEASE	HZF	04/21/2009