



Recommended P.C.B. Layout


**△ SPECIFICATION**  
 Current Rating: 2 Amp  
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute  
 Insulator Resistance: 1000 Megaohms Min. At DC 500V  
 Contact Resistance: 20 Milliohms Max. At DC 100mA  
 Operating Temperature: -55°C ~ +125°C  
 Housing: Thermoplastic Polyester+G.F.(UL94V-0)  
 Contacts: Copper Alloy, Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel  
 RoHS Compliant

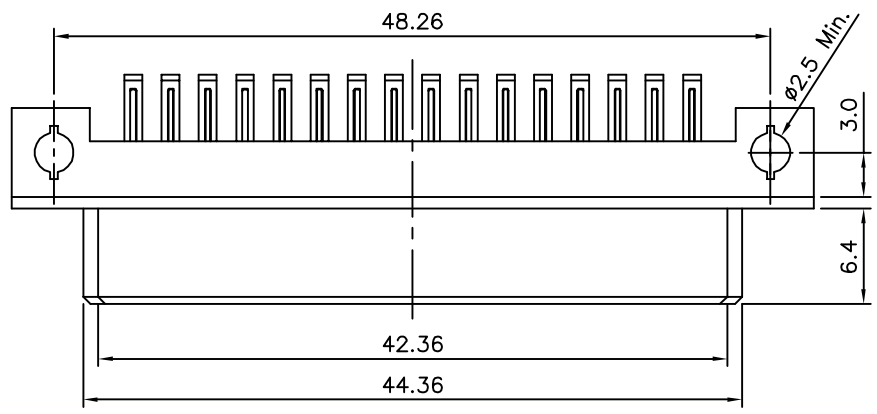

△

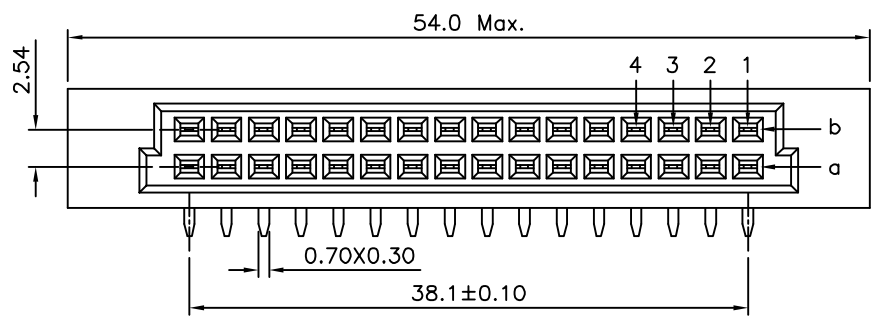

△

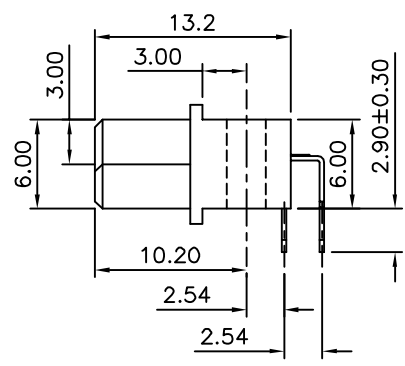

△

Item No.	Pitch	Position	Rows With Contacts	Contact Arrange
05650	2.54mm	32	a b	4 3 2 1 a b

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.5 .X ±0.25 .XX ±0.15
05650		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	07/16/2012
△ A0		NEW RELEASE	BECKY	05/04/2005