



Section A-A

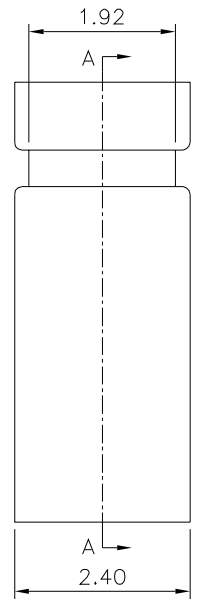

Section A-A

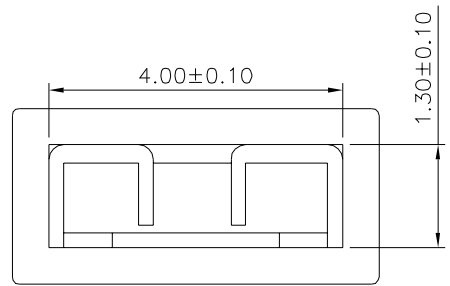

Section A-A

**SPECIFICATION**

Current Rating:1.0 Amp  
 Voitage Rating:30V RMS Max.  
 Dielectric Withstanding Voltage:500V AC Min. For 1 Minute  
 Insulator Resistance:1000 Megaohms Min. At 500V DC  
 Contact Resistance:30 Milliohms Max.  
 Operating Temperature:-45°C~+105°C  
 Insulator:PBT+15%G.F.(UL94V-0)

Item	Color
05740	Black
05744	Red
05741	Blue

Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. $\Delta$		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm$ 0.38 .XX $\pm$ 0.25 ANG $\pm$ 2°
05740		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	B3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$	B3	Modify Data	HZF	12/09/2019
$\Delta$	B2	Modify Data	HZF	02/08/2017
$\Delta$	B1	Modify Data	HZF	11/10/2010
$\Delta$	B0	Modify Data	HZF	06/22/2009
$\Delta$	B0	NEW RELEASE	HZF	06/22/2009