

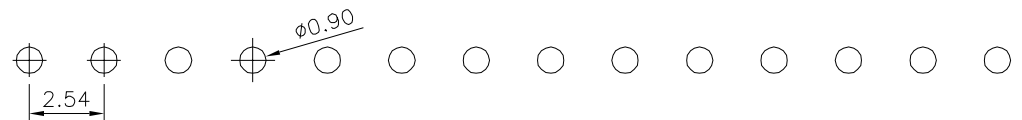

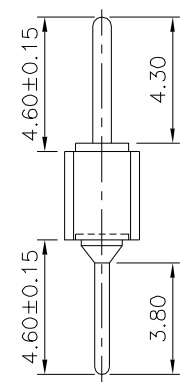


**SPECIFICATION**

Current Rating: 3 Amps/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 100V  
 Operating Voltage: 60V AC/DC  
 Operating Temperature: -55°C~+105°C  
 Pin: Brass, Gold Flash Over All, Over Nickel  
 Insulator: PPS(UL94V-0), Black  
 RoHS Compliant

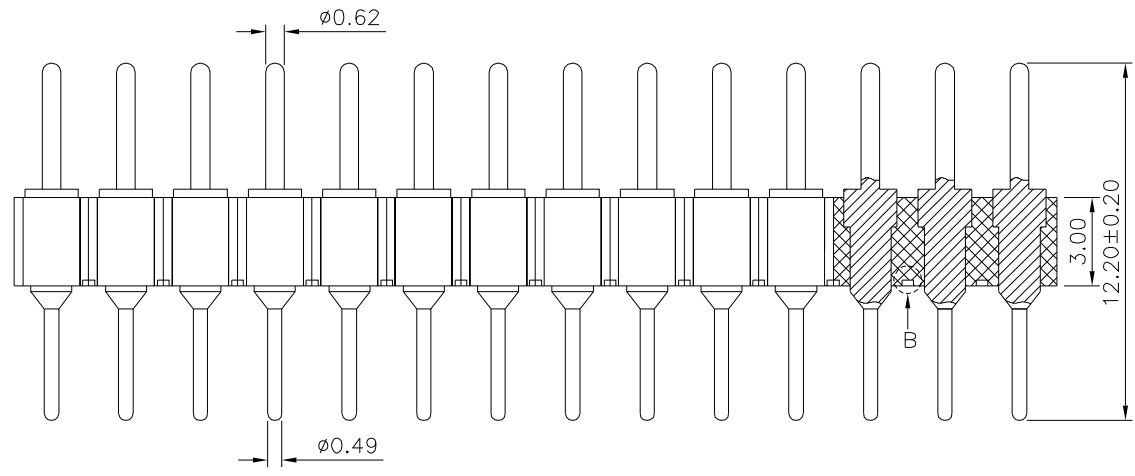

Recommended P.C.B. Layout

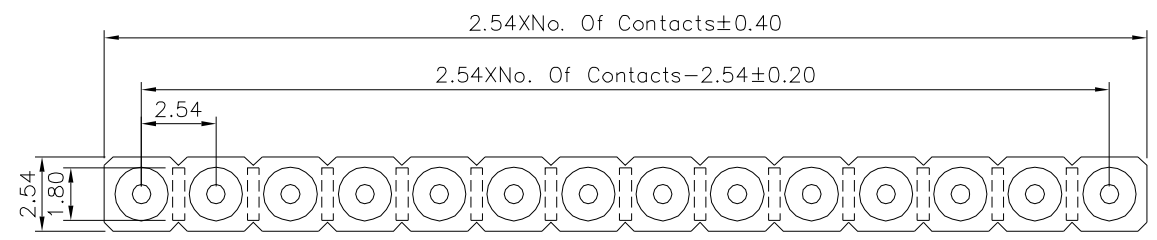

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |    |
|-------------|------|-------------|----|
| DRAWING No. |      | APPROVED BY |    |
| 05865       |      | MEI         |    |
|             |      | CHECKED BY  |    |
|             |      | HZF         |    |
|             |      | DRAWING BY  |    |
|             |      | HAO         |    |
| SCALE       | NONE | REV.        | BO |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±5°

|      |    |     |      |    |             |     |            |
|------|----|-----|------|----|-------------|-----|------------|
| UNIT | mm | NO. | REV. | BO | NEW RELEASE | HZF | 01/06/2016 |
|      |    |     |      |    | REVISIONS   | CHK | DATE       |