



△△ SPECIFICATION


Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operating Voltage: 60V AC/DC
 Operation Temperature: -40°C~+105°C
 Pin(Outer Sleeve): Brass, Tin Plated Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant




△ Recommended P.C.B. Layout

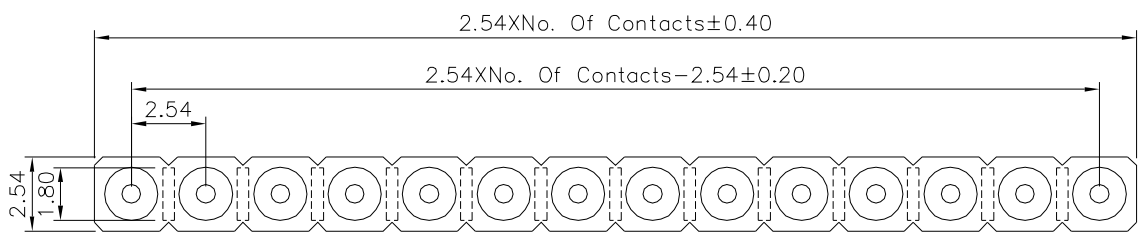


△

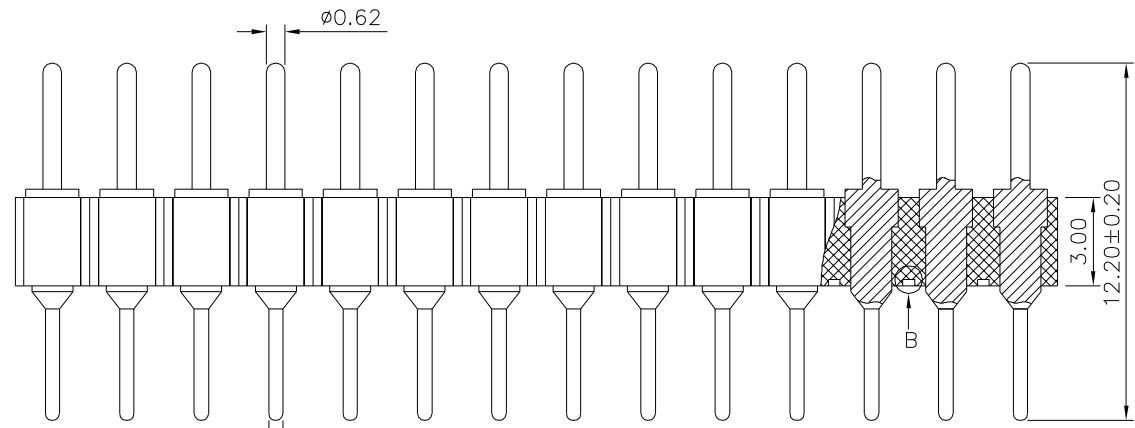

△

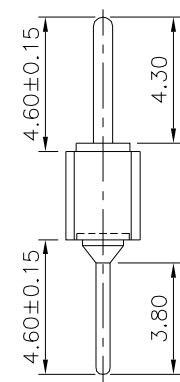

△



△ Detail: B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 05878

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°
 UNIT mm



| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-------------|-------|------------|
| 3 | A3 | Modify Data | HZF | 12/14/2017 |
| 2 | A2 | Modify Data | HZF | 03/17/2011 |
| 1 | A1 | Modify Data | BECKY | 05/05/2006 |
| 0 | A0 | NEW RELEASE | BECKY | 07/20/2005 |