
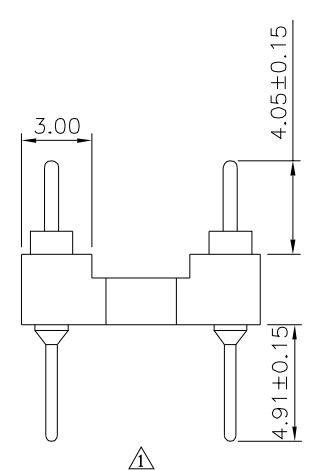
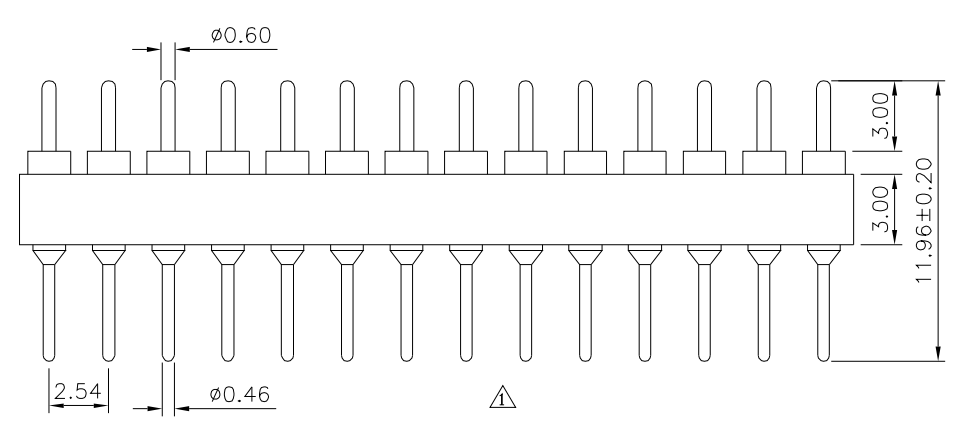


△ Recommended P.C.B Layout

△△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
 Contact Resistance:4 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operating Voltage:60V AC/DC
 Operating Temperature:-55°C~+105°C
 Pin(Outer Sleeve):Brass,Gold Plated Over Nickel
 Insulator:PBT(UL94V-0),Black
 RoHS Compliant

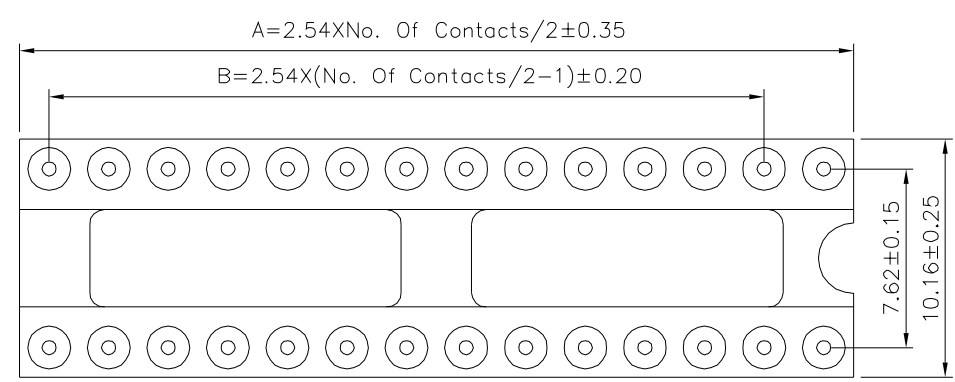

Pin	A	B	Type
06	7.62	5.08	Without Bar
08	10.16	7.62	
10	12.70	10.16	
14	17.78	15.24	
16	20.32	17.78	With Bar
18	22.86	20.32	
20	25.40	22.86	
24	30.48	27.94	
28	35.56	33.02	
32	40.64	38.10	
40	50.80	48.26	
48	60.96	58.42	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±5°
05927		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	08/03/2016
△1	A1	Modify Data	HZF	04/17/2012
△0	A0	NEW RELEASE	BECKY	07/20/2005