
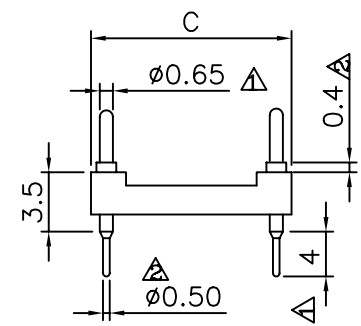
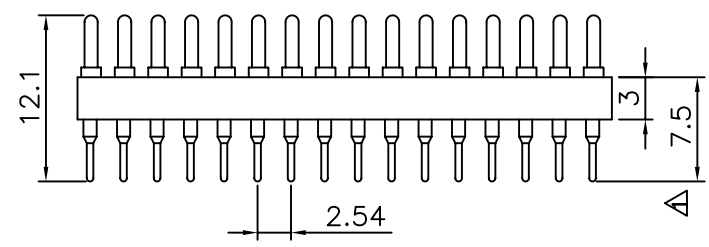


**SPECIFICATIONS:**

Dielectric Withstanding : 600V RMS.  
 Contact Resistance: 100 Milliohms Max.  
 Insulation Resistance : 5000 Megohms Min.  
 Temperature : -55°C To +125°C  
 Insertion Force : Average 500 GR  
 Extraction Test : Average 159 GR  
 Resist To Soldering Heat: Max. 260°C,5 Sec.  
 Contact: Copper Alloy,Gold Flash  
 Insulator: Grass Filled Polyester,UL94V-0  
 Sleeve: Brass,10Micro Inch Gold Plating Or  
 200Micro Inch Tin Plating

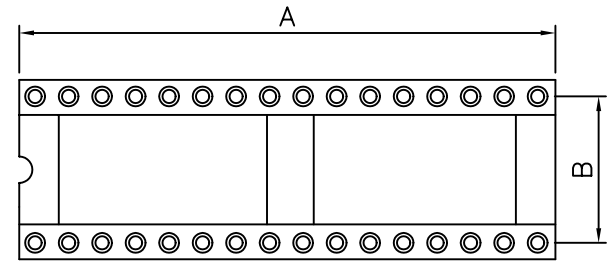

Position	A	B	C
20	25.40	15.24	17.78
24	30.48	15.24	17.78
28	35.56	15.24	17.78
32	40.64	15.24	17.78
36	45.66	15.24	17.78
40	50.80	15.24	17.78
42	53.34	15.24	17.78
48	60.96	15.24	17.78

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 05929

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.2  
 .XX  
 .XXX  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	ADD DIM.	MEI	2004/05/05
△	A1	MODIFY DIM.	MEI	2004/05/05
△	A0	NEW RELEASE	MEI	

SCALE NONE REV. A1