
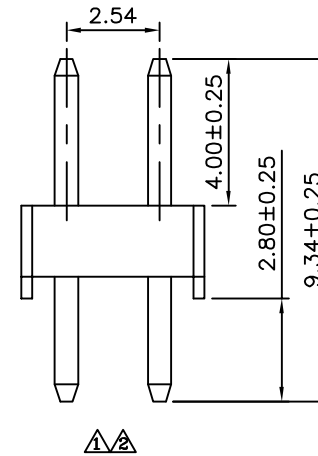
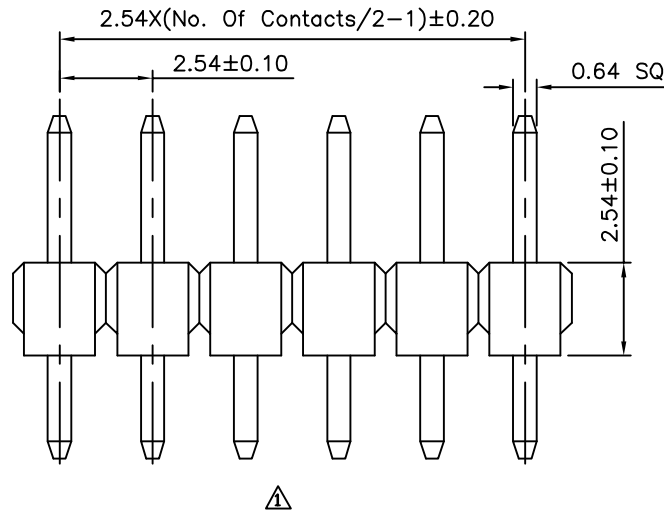
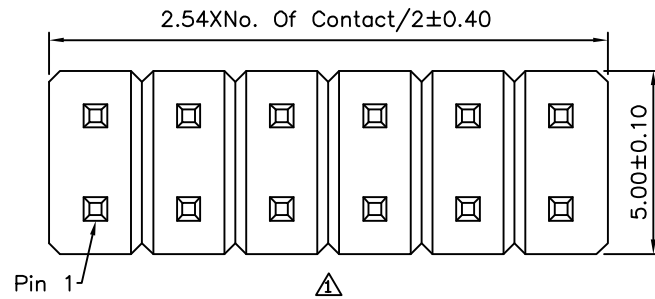


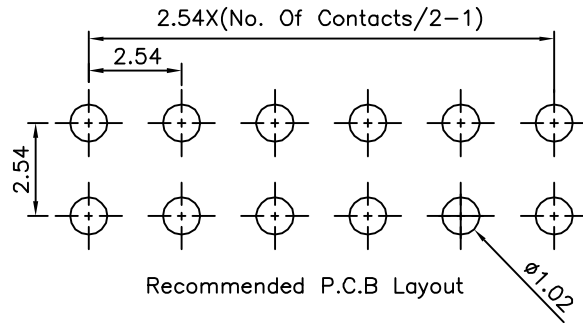

△ SPECIFICATION

- Current: 3A
- Withstanding Voltage: 1000V AC RMS
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megaohms Min.
- Operating Temperature: -55°C~+105°C
- Housing: PBT(UL94V-0),Black
- △ Contact: Brass,Gold Flash Over Nickel
- No. Of Contacts: 4~80 Contacts
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

06071

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A2


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	01/05/2016
△1	A1	Modify Data	HZF	12/22/2011
△0	A0	NEW RELEASE	HZF	06/15/2007