




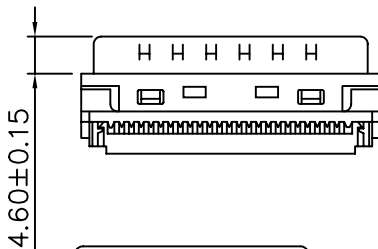




**SPECIFICATION**

Current Rating: 1A  
 Insulation Resistance : 500 Megohms/Min.  
 Withstanding Voltage : 500V AC/RMS For 1 Minute  
 Contact Resistance : 35 Milliohms Max.  
 Temperature Range : -55°C To +105°C  
 Housing And Cover : Plastic Thermoplastic

P.B.T UL 94V-0

Contact: Phosphor Bronze Gold Selective Plated  
 Shell : Steel, Nickel Plated Over Copper  
 Back Shell: Zinc Plated Nickel Over Copper  
 Jackscrew : Steel Nickel Plated Over Copper  
 Screw : Steel Nickel Plated Over Copper  
 Cable Clipper: Steel Nickel Plated

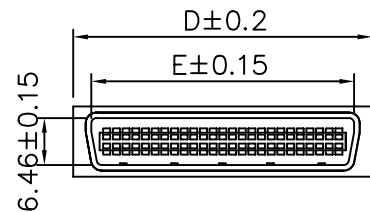

Circuits	A	B	C	D	E	F	G	H	I
50	37.30	39.30	34.10	39.30	35.60	9.30	13.70	31.80	53.10
68	48.73	50.70	45.50	50.60	46.95	9.30	13.60	42.40	63.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 06094

APPROVED BY  
 MEI  
 CHECKED BY  
 RAN  
 DRAWING BY  
 HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 .XXX

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE