
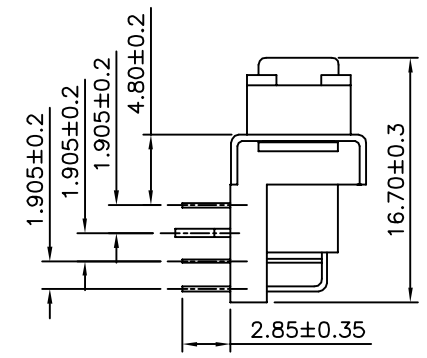
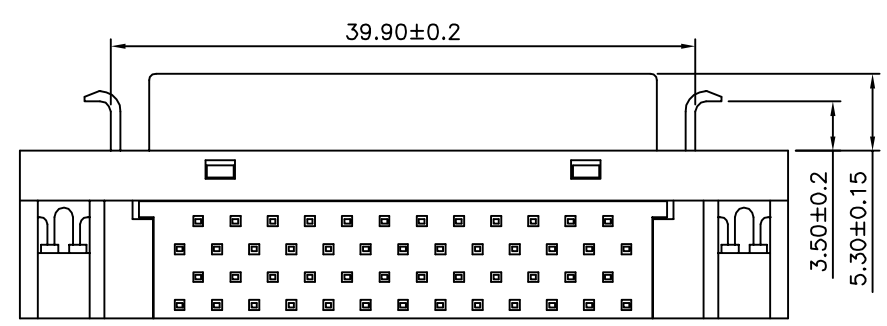


△ SPECIFICATION
 Contact Current Rating:0.5A
 Dielectric Withstanding Voltage:500V AC
 Insulation Resistance:>500 Megaohms Min.
 Contact Resistance:35 Milliohms Max.
 Operation Temperature:-55°C~+85°C
 Housing And Cover:PBT(UL94V-0),Black
 Contact:Phosphor Bronze
 Selective Gold Plated 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 Bracket:Steel,Nickel Plated Over Copper
 Boardlock:Brass,Tin Plated Over Copper
 RoHS Cpmpliant

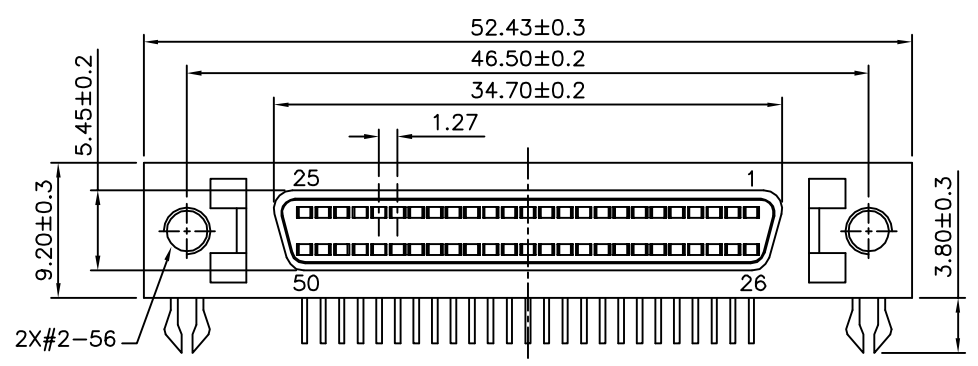

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
06116		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/02/2012
△ A0		NEW RELEASE	HZF	09/09/2010