
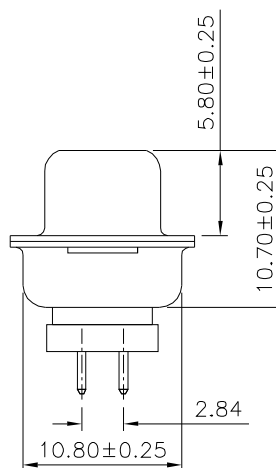
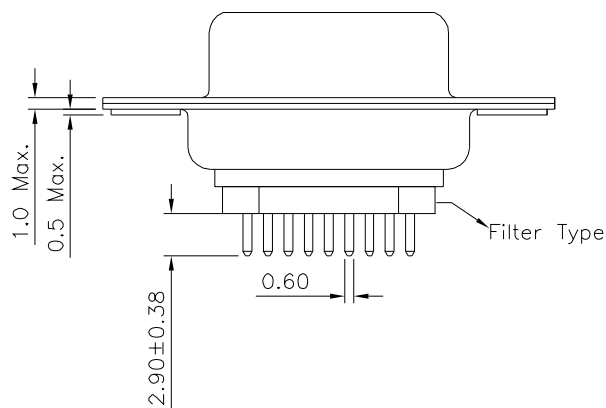


Recommended P.C.B. Layout

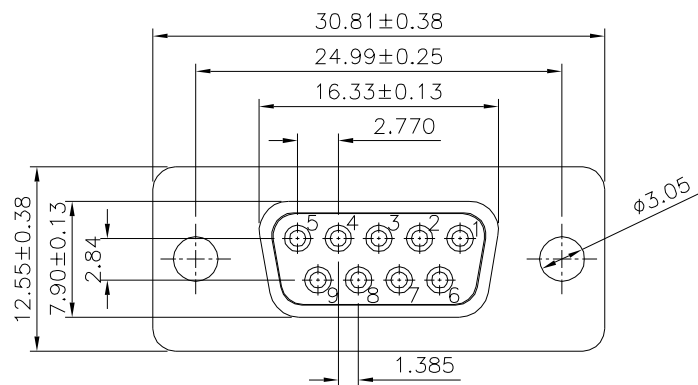

SPECIFICATION

Current Rating:3 Ampere Per Contact
Voltage:250V AC RMS Max.
Dielectric Withstand Voltage:1000V AC(RMS)
Contact Resistance:25 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-55°C~+85°C
Total Mating Force:4.0 Kgf Max.
Total Unmating Force:1.0 Kgf Min.
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over All,Over Nickel
Shell:SPCC,Nickel Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

06148

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.XX ±0.25

.XXX ±0.13

ANG. ±2°


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

04/05/2019