

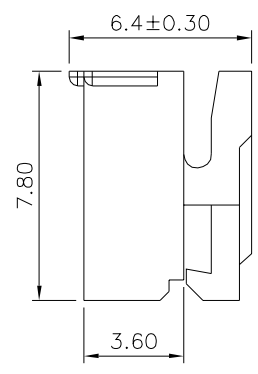
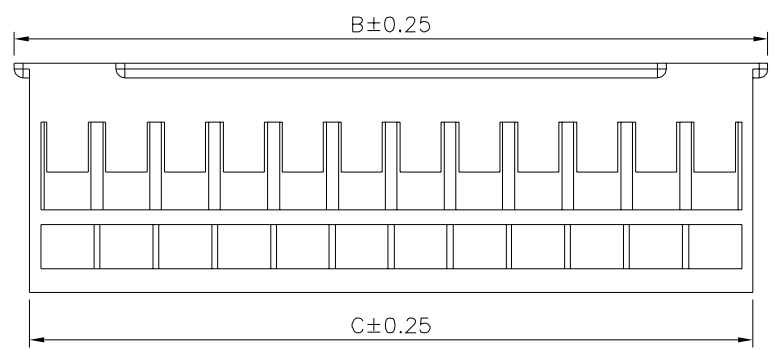



SPECIFICATION

Current Rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-0)
 RoHS Compliant

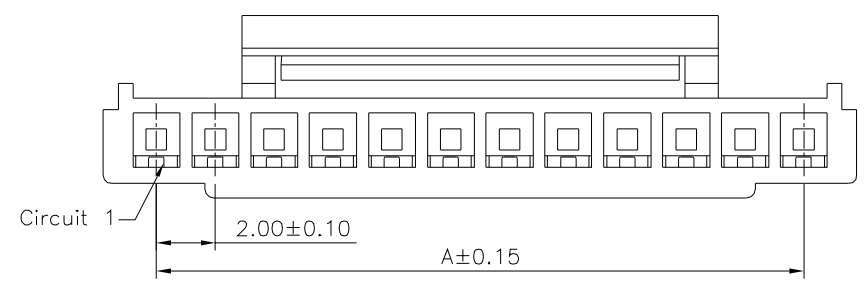

03~12 Pin

02 Pin

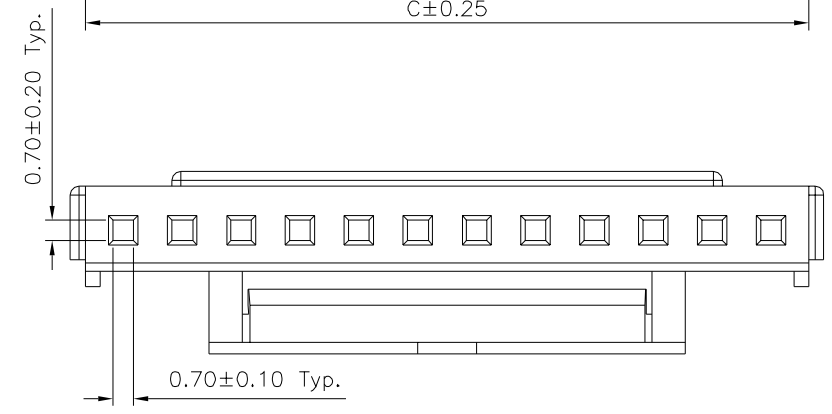

Pin	A	B	C
2	2.00	5.60	4.60
3	4.00	7.60	6.60
4	6.00	9.60	8.60
5	8.00	11.60	10.60
6	10.00	13.60	12.60
7	12.00	15.60	14.60
8	14.00	17.60	16.60
9	16.00	19.60	18.60
10	18.00	21.60	20.60
11	20.00	23.60	22.60
12	22.00	25.60	24.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°
06499		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	05/09/2018
		REVISIONS		