
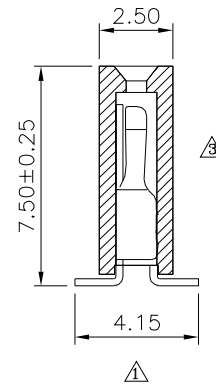
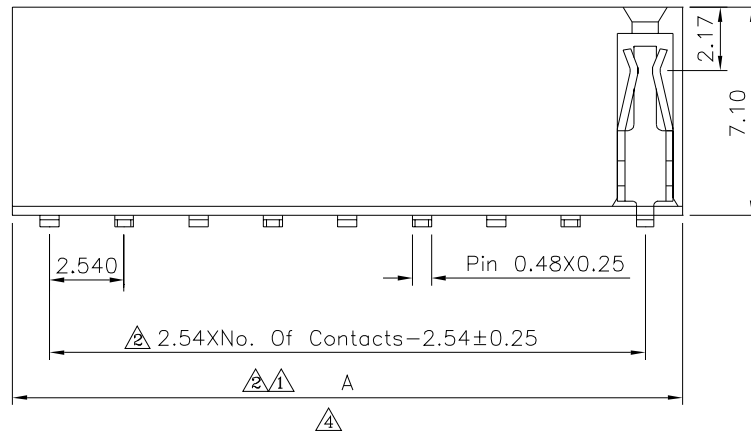


Recommended P.C.B Layout

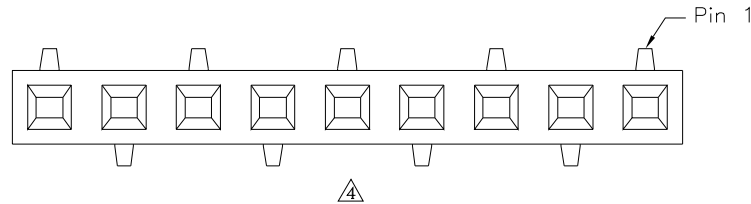

SPECIFICATION

Current Rating:3 Amp
 Dielectric Withstanding:600V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

⚠	Pin	A	Pin	A
	02	5.08	22	56.38
	03	7.62	23	58.92
	04	10.66	24	61.46
	05	13.20	25	64.00
	06	15.74	26	66.54
	07	18.28	27	69.08
	08	20.82	28	71.62
	09	23.36	29	74.16
	10	25.90	30	76.70
	11	28.44	31	79.24
	12	30.98	32	81.78
	13	33.52	33	84.32
	14	36.06	34	86.86
	15	38.60	35	89.40
	16	41.14	36	91.94
	17	43.68	37	94.48
	18	46.22	38	97.02
	19	48.76	39	99.56
	20	51.30	40	102.10
	21	53.84		

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

06674

SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.35
 .XX ±0.25
 .XXX ±0.05

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A4	Modify Data	HZF	04/24/2020
⚠	A3	Modify Data	HZF	08/17/2010
⚠	A2	Modify Data	HZF	01/06/2010
⚠	A1	Modify Data	HZF	12/22/2009
⚠	A0	NEW RELEASE	SHIN	08/14/2006