

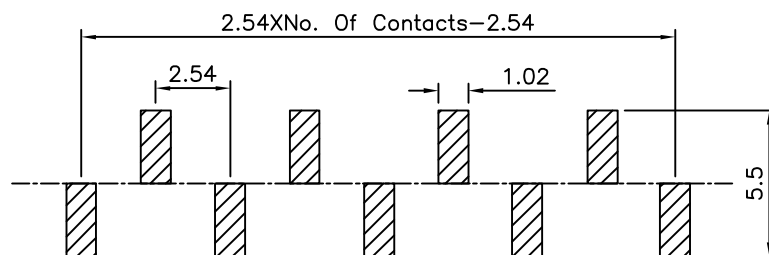


SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

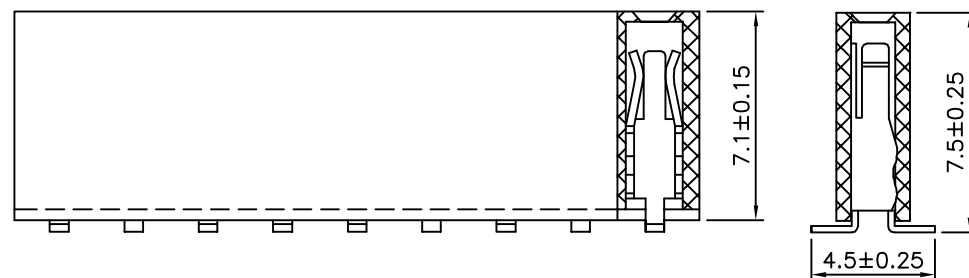

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

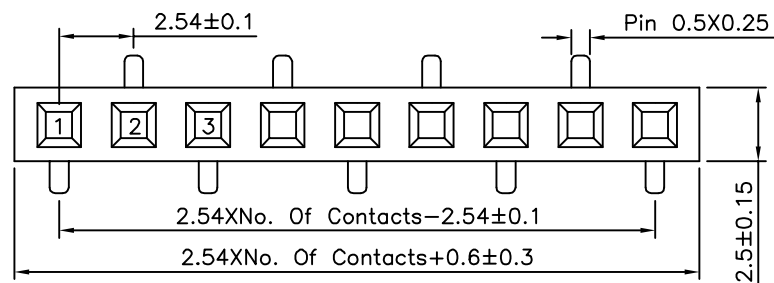

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

06675

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

40

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

	UNIT mm
--	------------



5°	
	NO.

AO
REV.

	NEW
7.	

W RE

RELEA
REV

ASE
VISIO

CONCLUSIONS

H2
CH

ZF
HK

	11.

/05.
DA