
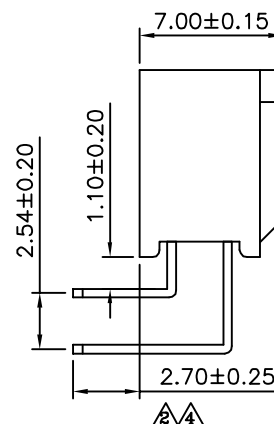
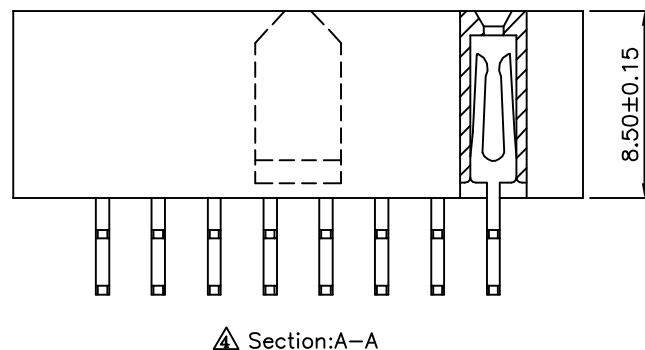
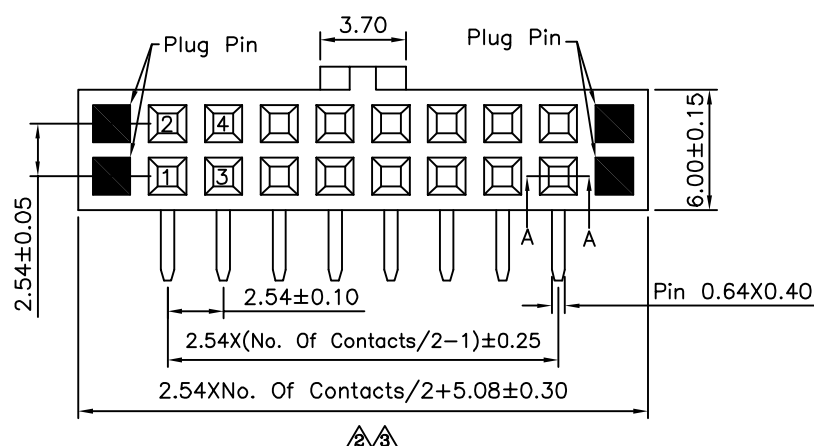


# SPECIFICATION

Current Rating:3.0 Amp  
 Insulation Resistance:1000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Dielectric Withstanding:1000V AC/DC  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 RoHS Compliant

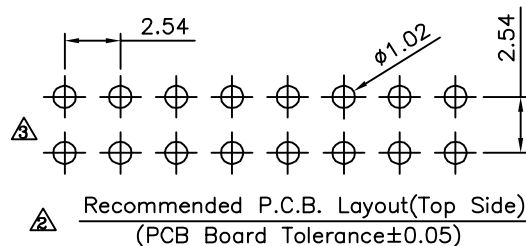

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

06788

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A4

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.15  
 ANG. ±3°

UNIT  
 mm



|          |             |       |            |
|----------|-------------|-------|------------|
| △ A4     | Modify Data | HZF   | 05/07/2014 |
| △ A3     | Modify Data | HZF   | 11/23/2009 |
| △ A2     | Modify Data | HZF   | 03/06/2009 |
| △ A1     | Modify Data | BECKY | 04/20/2006 |
| △ A0     | NEW RELEASE | BECKY | 09/22/2005 |
| NO. REV. | REVISIONS   | CHK   | DATE       |