
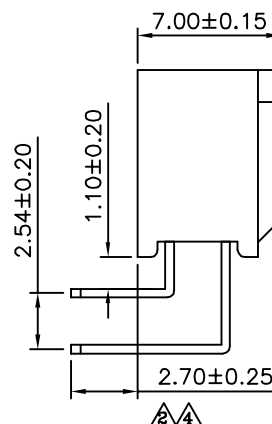
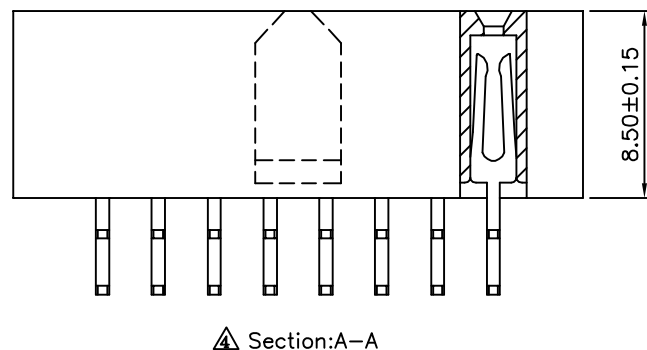
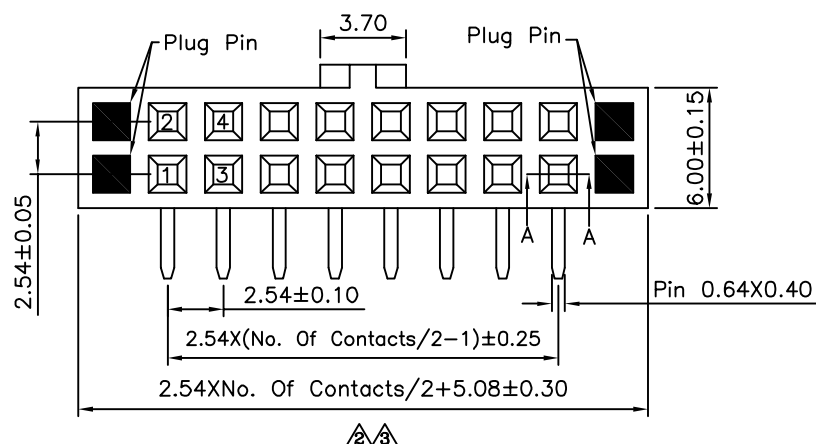


SPECIFICATION

Current Rating:3.0 Amp
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Dielectric Withstanding:1000V AC/DC
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

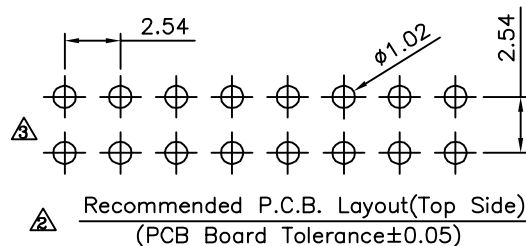

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

06789

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SAN

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



△ A4	Modify Data	HZF	05/07/2014
△ A3	Modify Data	HZF	11/23/2009
△ A2	Modify Data	HZF	03/06/2009
△ A1	Modify Data	BECKY	04/20/2006
△ A0	NEW RELEASE	BECKY	09/22/2005
NO. REV.	REVISIONS	CHK	DATE