File No.	6970A26806	SHEET	1/1

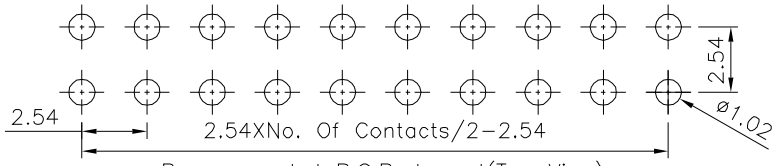

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

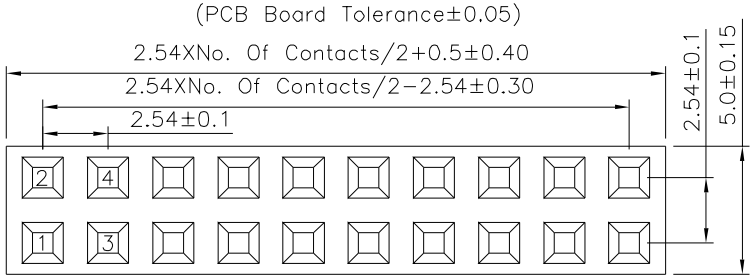

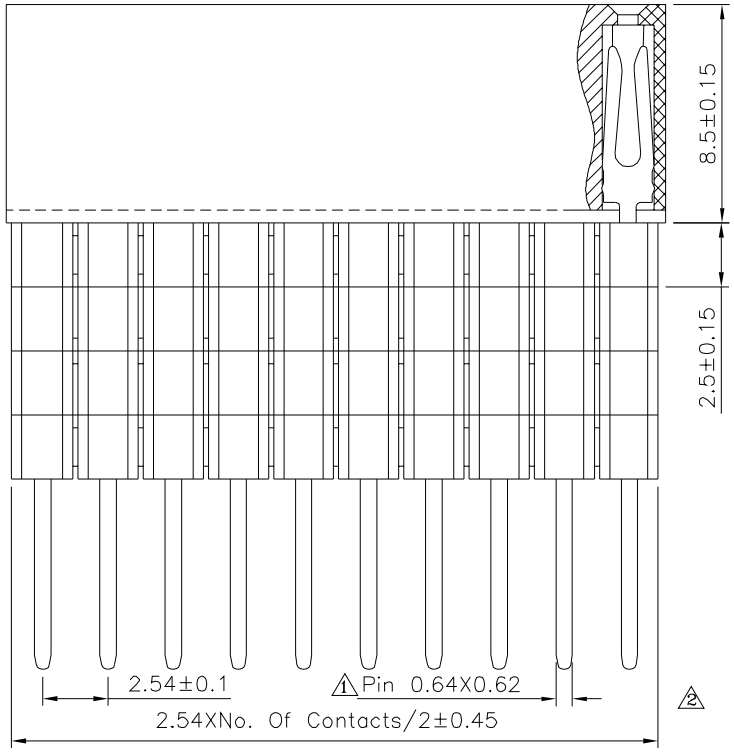

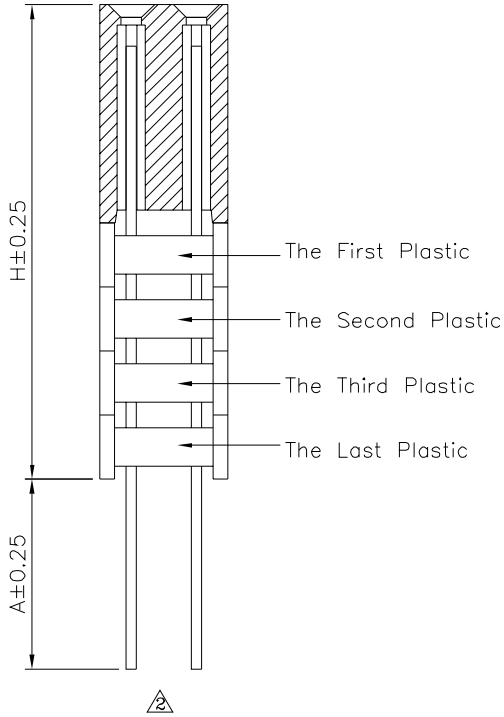

SPECIFICATION

Current Rating:3A
2 Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:−40°C~+105°C
1 Insulator:PA9T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	07005
SCALE	NONE

APPROVED BY	EMILY
CHECKED BY	HZF
DRAWING BY	HAO
REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
2 X. ±0.30 X.° ±2°
.X ±0.25 .X° ±1.5°
.XX ±0.20 .XX° ±1.0°
.XXX ±0.15 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	01/26/2024
1	A1	Modify Data	HZF	12/20/2023
0	A0	NEW RELEASE	HZF	05/03/2014