

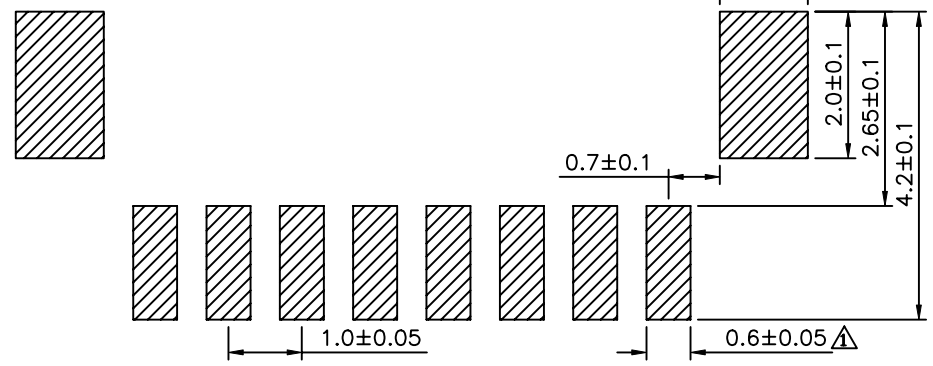
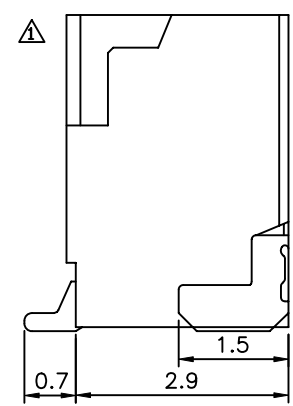


△ SPECIFICATION
 Voltage Rating:50V AC
 Current Rating:1.0A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Dielectric Withstanding Voltage:500V AC/1 Minute
 Temperature Range:-40°C~+105°C
 Insulator:High Temperature Plastic(UL94V-0),Natural
 Contact:Phosphor Bronze,Tin Plated
 RoHS Compliant

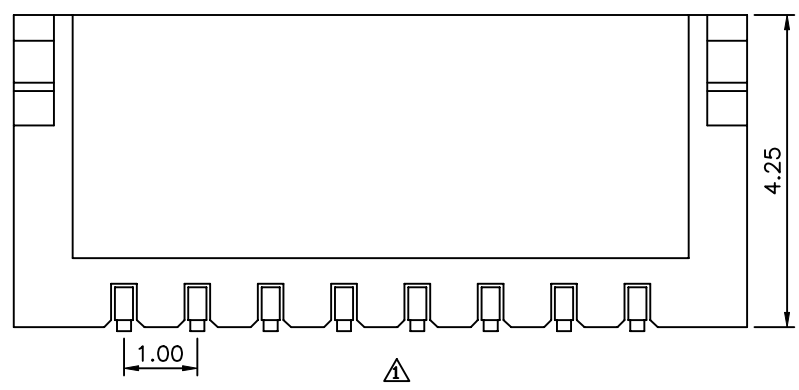

Recommended P.C.B. Layout

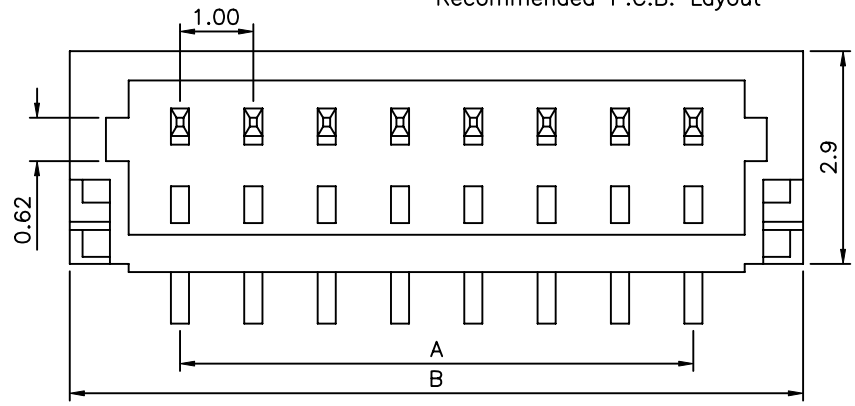

| Pos. | A | B |
|------|------|------|
| 2 | 1.0 | 4.0 |
| 3 | 2.0 | 5.0 |
| 4 | 3.0 | 6.0 |
| 5 | 4.0 | 7.0 |
| 6 | 5.0 | 8.0 |
| 7 | 6.0 | 9.0 |
| 8 | 7.0 | 10.0 |
| 9 | 8.0 | 11.0 |
| 10 | 9.0 | 12.0 |
| 11 | 10.0 | 13.0 |
| 12 | 11.0 | 14.0 |
| 13 | 12.0 | 15.0 |
| 14 | 13.0 | 16.0 |
| 15 | 14.0 | 17.0 |
| 16 | 15.0 | 18.0 |
| 20 | 19.0 | 22.0 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.15 |
| 07268 | | MEI | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | |
| | | WZL | | |
| SCALE | NONE | REV. | A1 | UNIT |
| | | | | mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Modify Data | HZF | 04/06/2010 |
| △ A0 | | NEW RELEASE | | |