

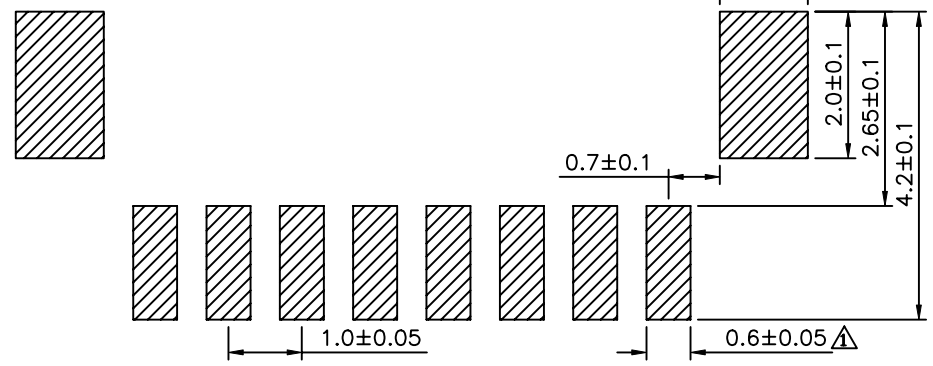
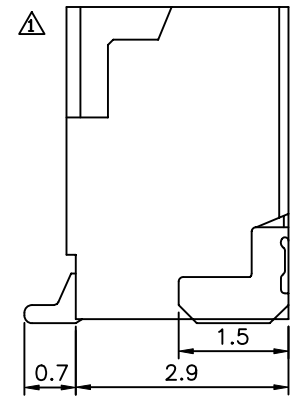


**△ SPECIFICATION**  
 Voltage Rating:50V AC  
 Current Rating:1.0A  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Dielectric Withstanding Voltage:500V AC/1 Minute  
 Temperature Range:-40°C~+105°C  
 Insulator:High Temperature Plastic(UL94V-0),Natural  
 Contact:Phosphor Bronze,Tin Plated  
 RoHS Compliant

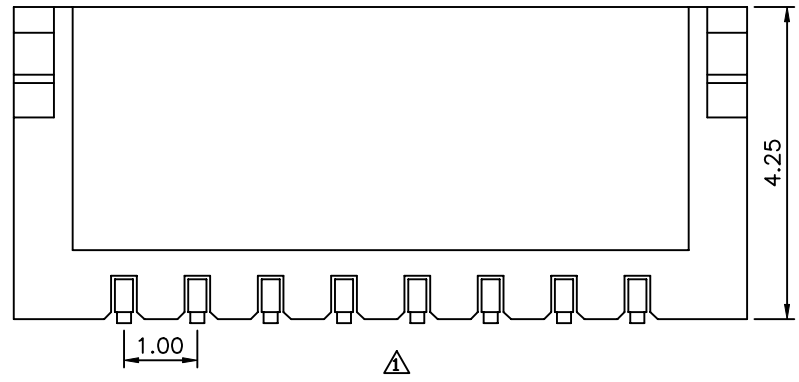

Recommended P.C.B. Layout

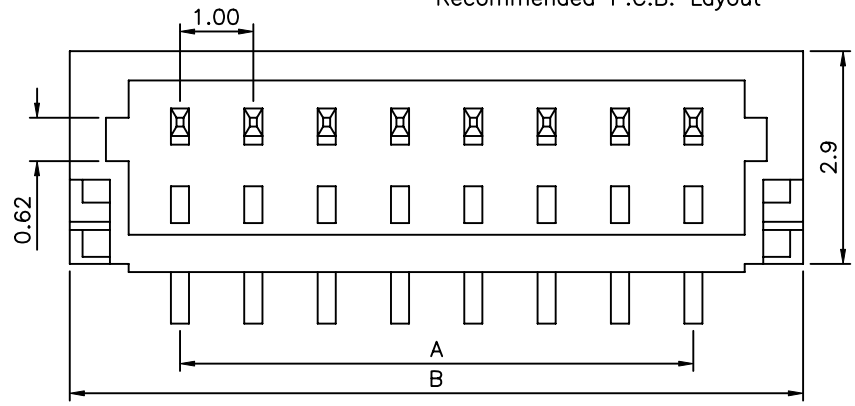

△ Pos.	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.15
07277		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		WZL		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/06/2010
△ A0		NEW RELEASE		