

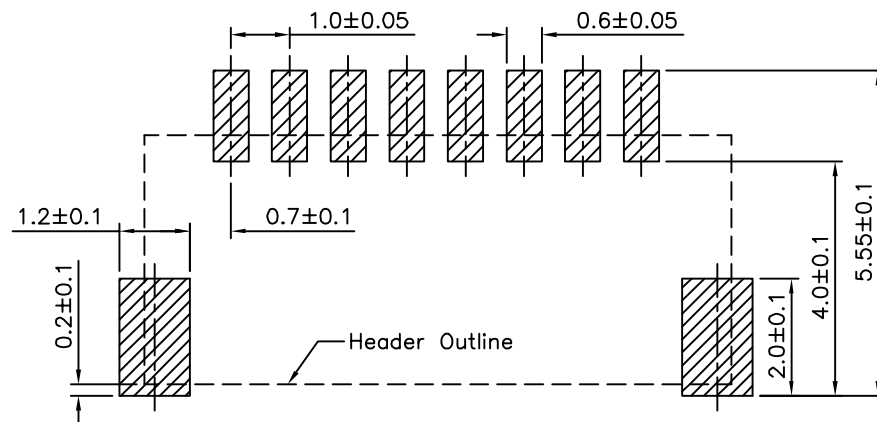
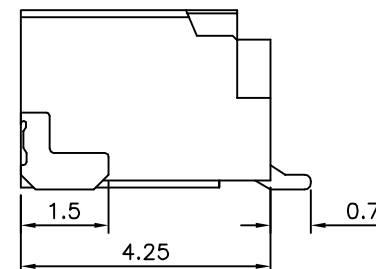


SPECIFICATION

Current Rating:1.0A
Voltage Rating:50V AC
Dielectric Withstanding Voltage:500V AC/Minute
Temperature Range:-40°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Contact:Phosphor Bronze,Tin Plated
Insulator:PA6T(UL94V-0),Nature
RoHS Compliant

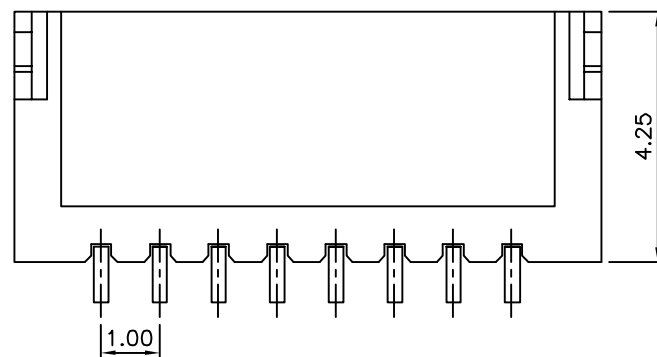

Recommended P.C.Board Layout

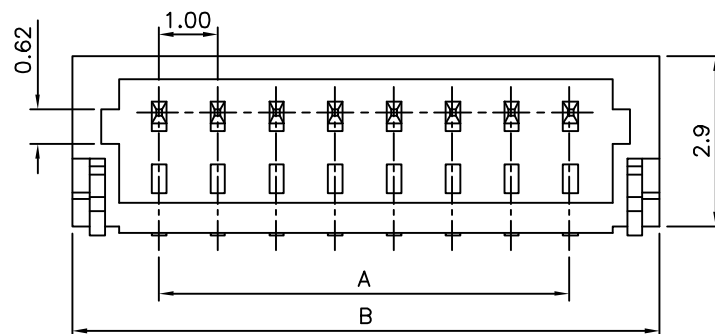

Pin	A	B
*2	1.0	4.0
*3	2.0	5.0
*4	3.0	6.0
*5	4.0	7.0
*6	5.0	8.0
*7	6.0	9.0
*8	7.0	10.0
*9	8.0	11.0
*10	9.0	12.0
*11	10.0	13.0
*12	11.0	14.0
*13	12.0	15.0
*14	13.0	16.0
*15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

The Mark Of "*" Are Toolled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07278

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.25
.XX ±0.15
ANG.

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

07/15/2012