

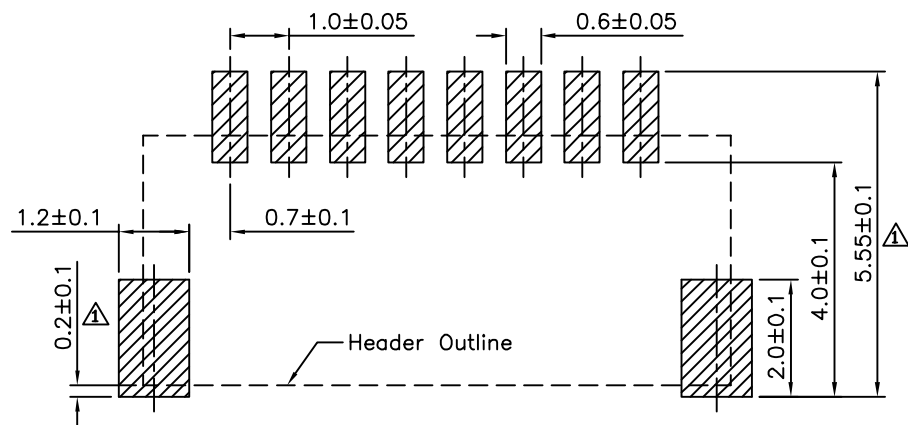


△ SPECIFICATION

Current Rating:1.0A
Voltage Rating:50V AC
Dielectric Withstanding Voltage:500V AC/Minute
Temperature Range:-40°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Contact:Phosphor Bronze,Tin Plated
Insulator:PA6T(UL94V-0),Nature
RoHS Compliant

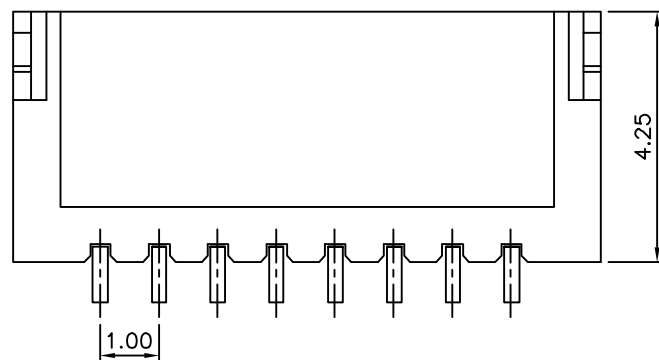

△ Recommended P.C.Board Layout

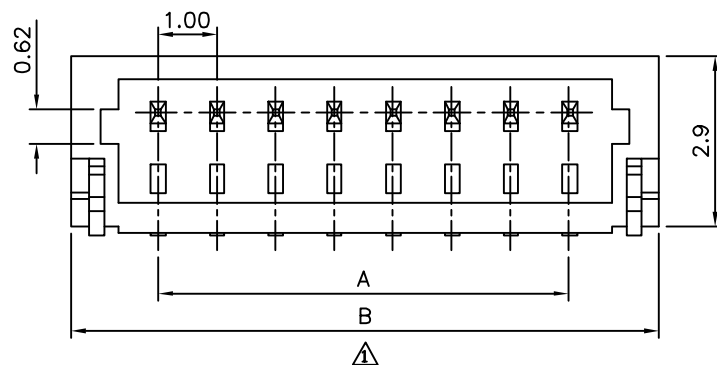

Pin	A	B
* 2	1.0	4.0
* 3	2.0	5.0
* 4	3.0	6.0
* 5	4.0	7.0
* 6	5.0	8.0
* 7	6.0	9.0
* 8	7.0	10.0
* 9	8.0	11.0
*10	9.0	12.0
*11	10.0	13.0
*12	11.0	14.0
*13	12.0	15.0
*14	13.0	16.0
*15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

△ The Mark Of "*" Are Tooled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07306

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


△ .X ±0.25

.XX ±0.15

ANG.

UNIT

mm



△ A2

Modify Data

HZF

01/15/2013

△ A1

Modify Data

HZF

10/19/2011

△ A0

NEW RELEASE


NO. REV.

REVISIONS




CHK

DATE


SPECIFICATION
Q'ty:1000 PCS/Reel
RoHS Compliant

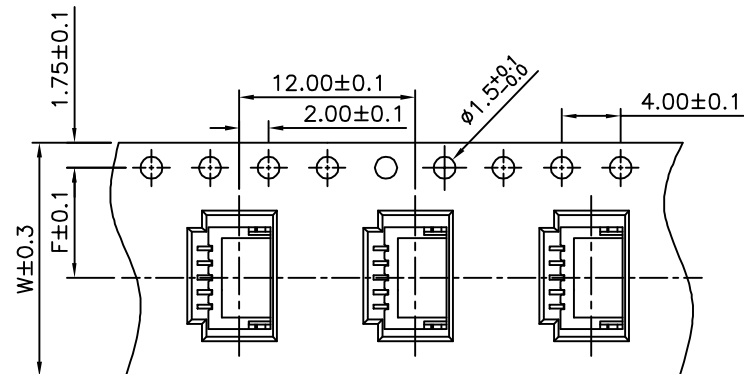

2~13 Contacts

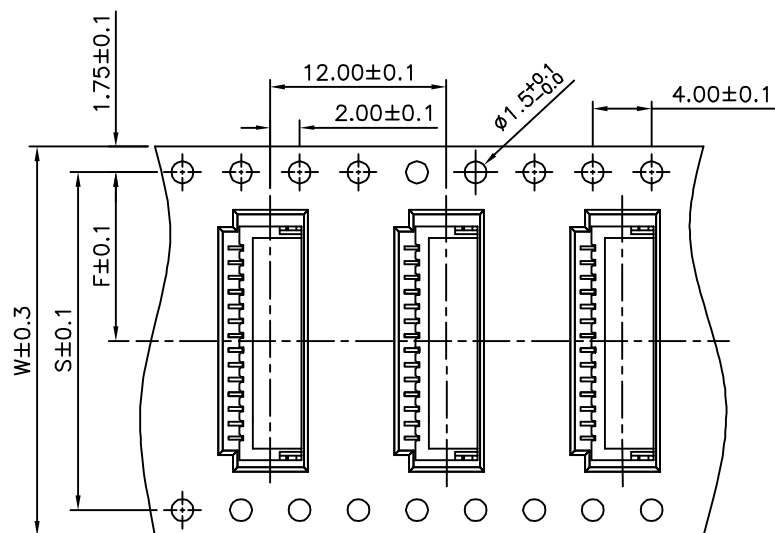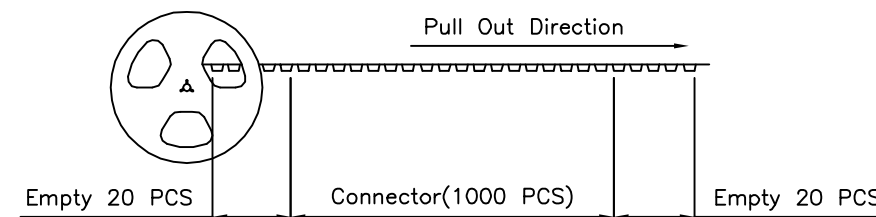

14~16,20 Contacts

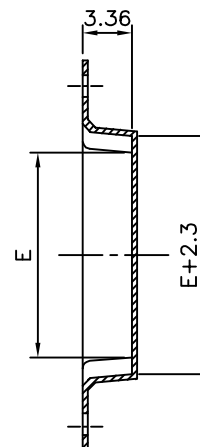

Pin	W	F	S	E
*02	16.0	7.5		2.0
*03	16.0	7.5		3.0
*04	16.0	7.5		4.0
*05	16.0	7.5		5.0
*06	24.0	11.5		6.0
*07	24.0	11.5		7.0
*08	24.0	11.5		8.0
*09	24.0	11.5		9.0
*10	24.0	11.5		10.0
*11	24.0	11.5		11.0
*12	24.0	11.5		12.0
*13	24.0	11.5		13.0
*14	32.0	14.2	28.4	14.0
*15	32.0	14.2	28.4	15.0
16	32.0	14.2	28.4	16.0
20	44.0	20.2	40.4	20.0

△ The Mark Of "*" Are Tooled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07306


APPROVED BY
EMILY

CHECKED BY
HZF

DRAWING BY
SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.25
.XX ±0.15
ANG.

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	01/15/2013
△ A1		Modify Data	HZF	10/19/2011
△ A0		NEW RELEASE		

SCALE

NONE

REV.

A2