


MATERIALS AND FINISH
 Shell: Steel Material, Front Shell Nickel Finished
 Back Shell Tin Finished
 Insulator: PBT Thermoplastic, 30% Glass Filled,
 UL 94V-0 Rated, Black Color
 Contact Material: Brass
 Contact Finish: Full Gold Flash

ELECTRICAL CHARACTERISTICS
 Contact Current Rating: 5.0 Amps
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 5000 Megohms Min.
 Dielectric Withstanding Voltage: 1000V AC Min.
 Temperature Rating: -55°C ~ +105°C

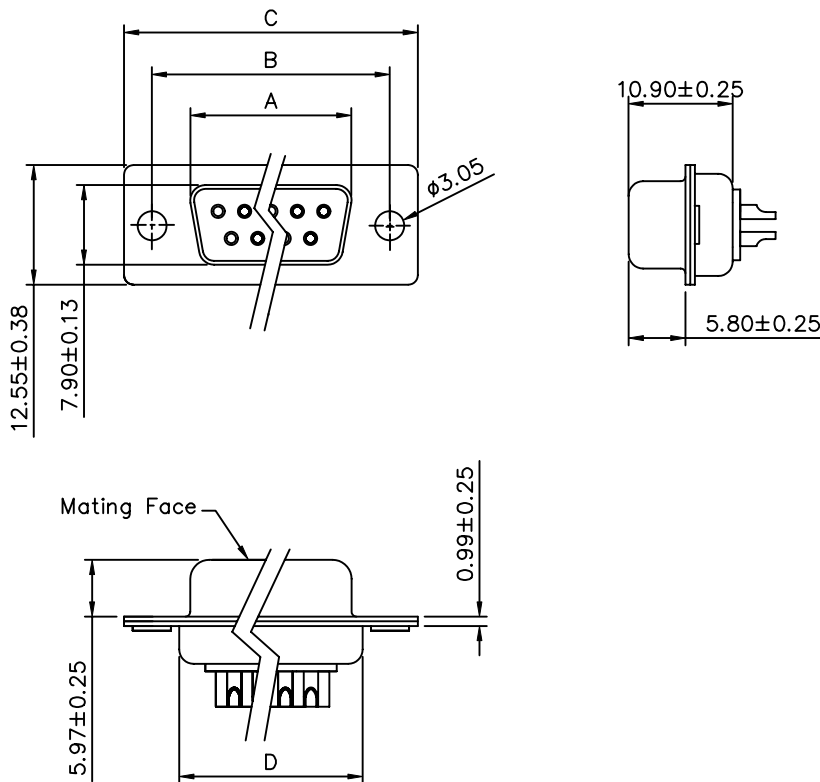

Contacts	A ± 0.25	B ± 0.13	C ± 0.38	D ± 0.25	E
09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

07449

APPROVED BY

MEI

CHECKED BY

SHIN


DRAWING BY

INGRID

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X
 .XX ± 0.13
 ANG. $\pm 2^\circ$

UNIT mm



SCALE

NONE

REV.

A0

NO. REV.

NEW RELEASE
 REVISIONS

SHIN
 CHK

03/04/2007
 DATE