


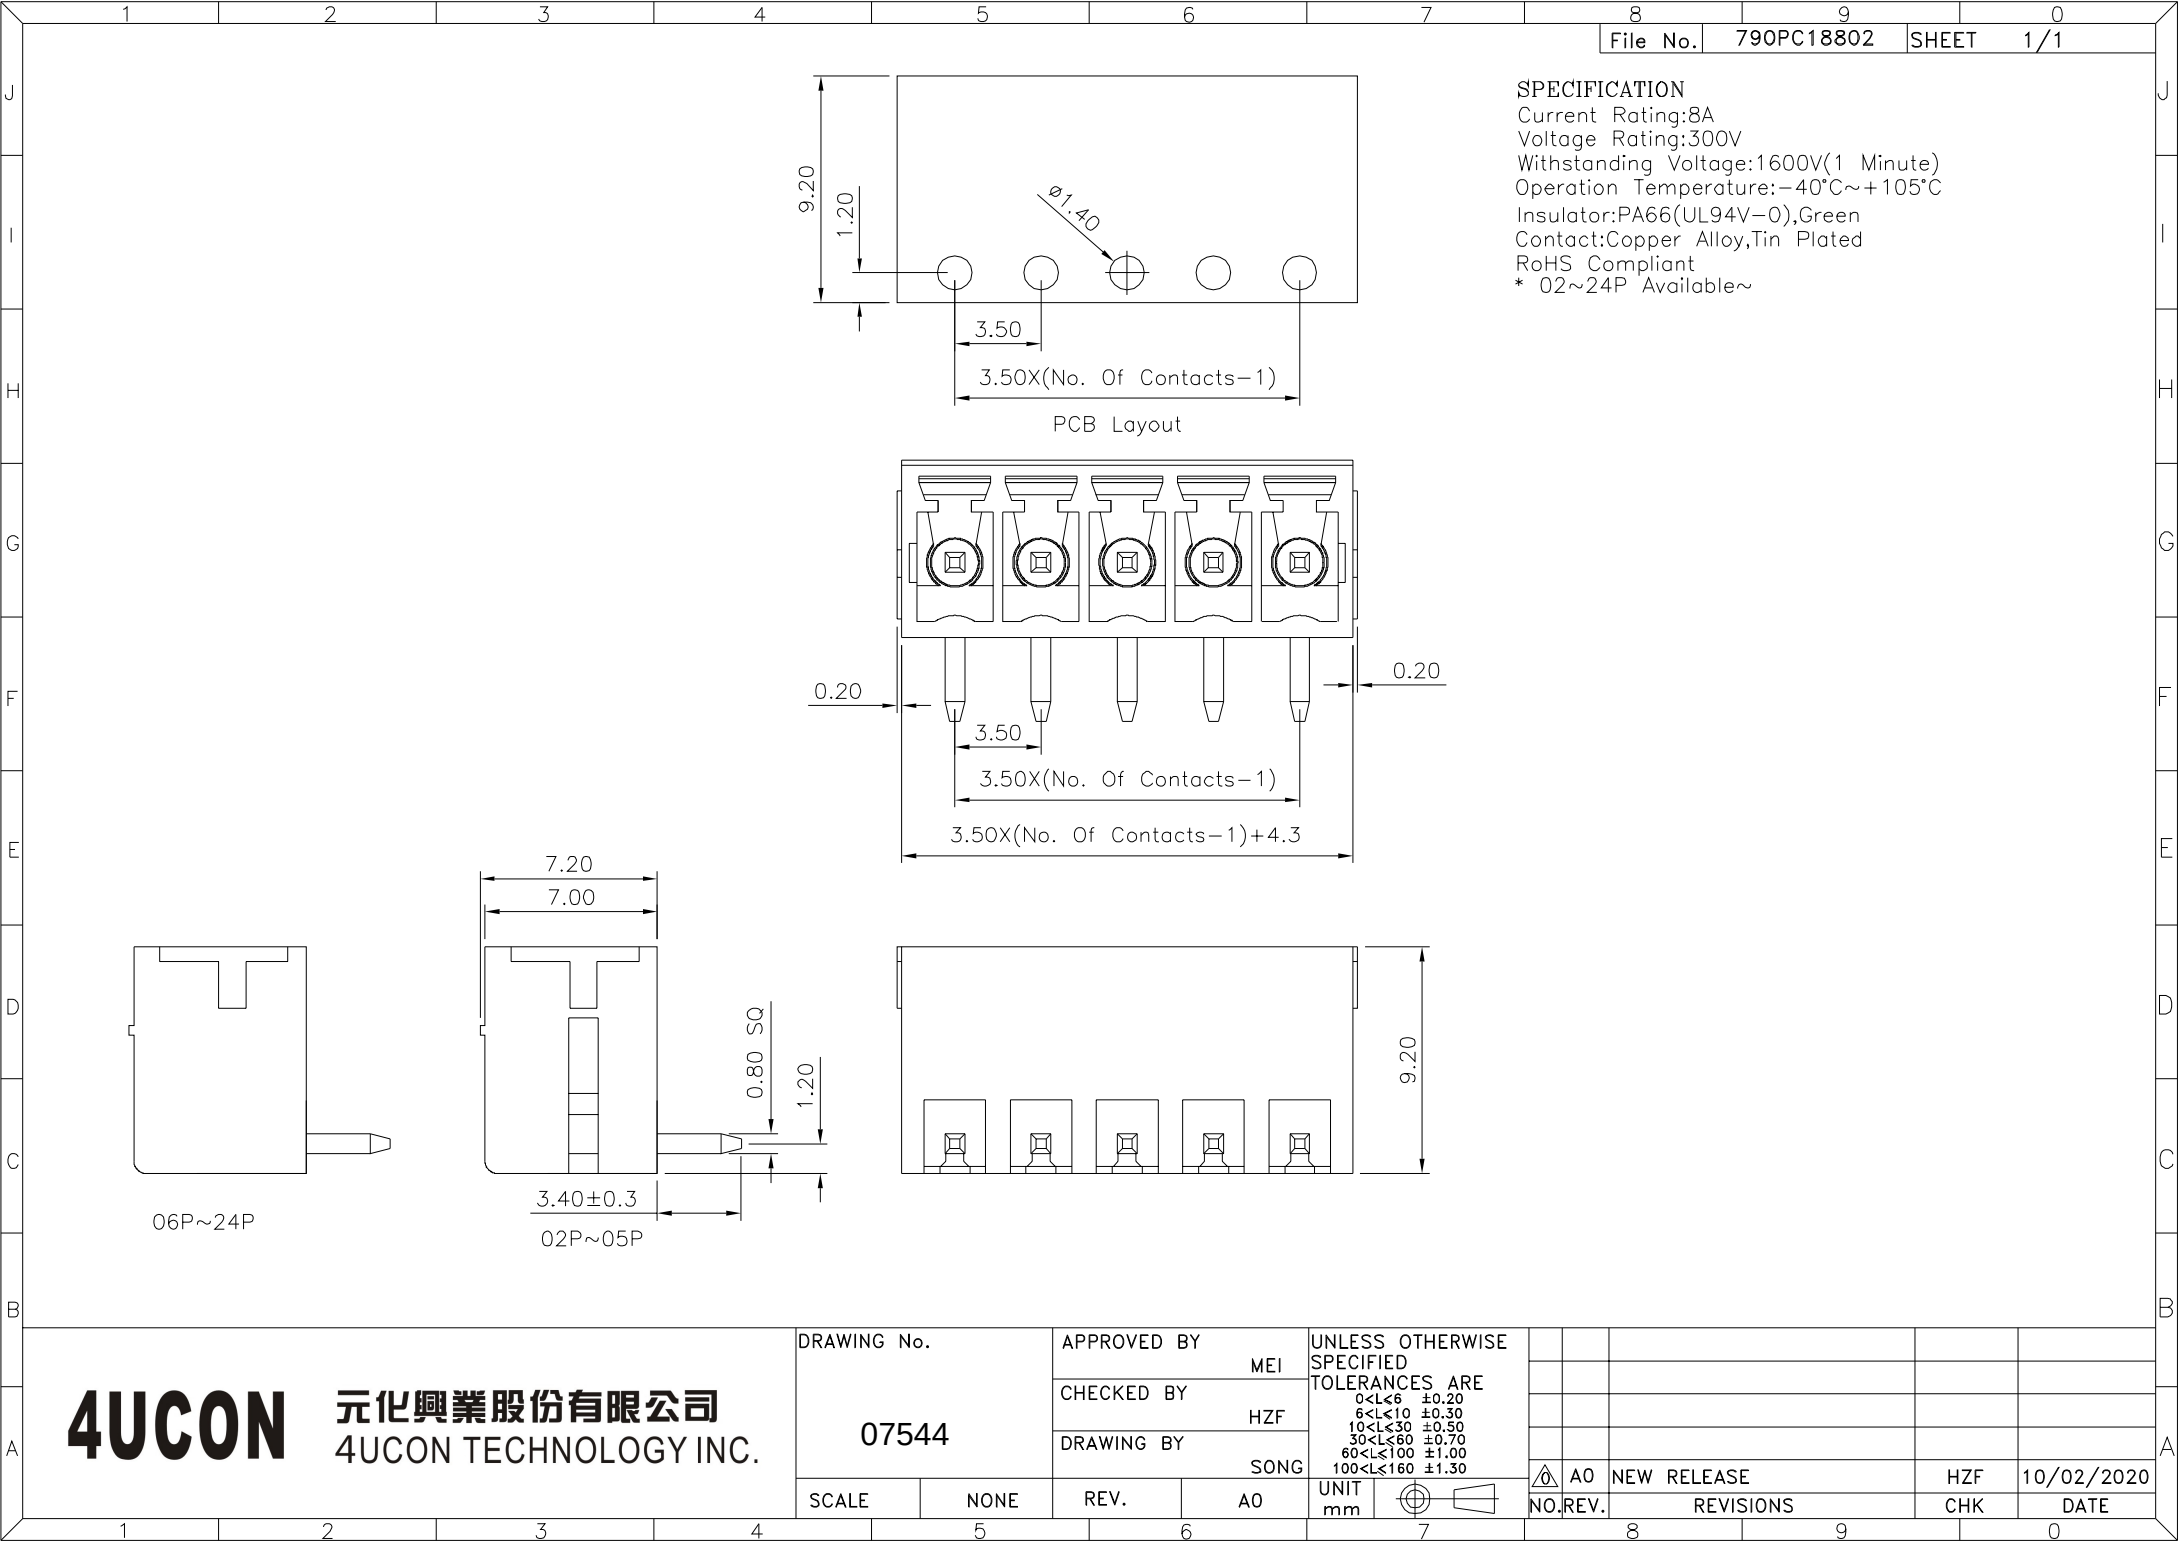

SPECIFICATION
Current Rating:8A
Voltage Rating:300V
Withstanding Voltage:1600V(1 Minute)
Operation Temperature:-40°C~+105°C
Insulator:PA66(UL94V-0),Green
Contact:Copper Alloy,Tin Plated
RoHS Compliant
* 02~24P Available~

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

07544

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
0<L≤6 ±0.20
6<L≤10 ±0.30
10<L≤30 ±0.50
30<L≤60 ±0.70
60<L≤100 ±1.00
100<L≤160 ±1.30

UNIT

mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

10/02/2020

DATE