
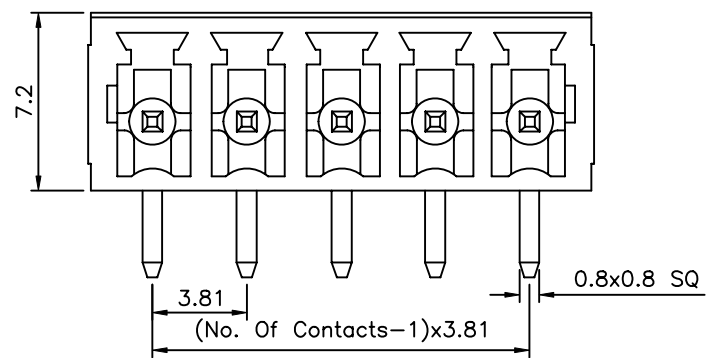
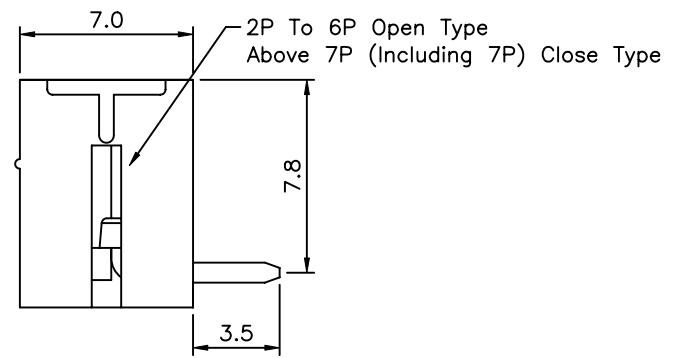


P.C.B Layout

SPECIFICATION

Current Rating:8A
 Voltage Rating:250V AC
 Withstanding Voltage:AC 1200V(1Minute)
 Insulation Resistance:500 Megaohms At DC 500V
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5Seconds Max.
 Insulator Body(Housing):Polyamide
 (Glass Filled)UL94V-0,Green
 Solder Pin:Brass,Tin Plated
 RoHS Compliant

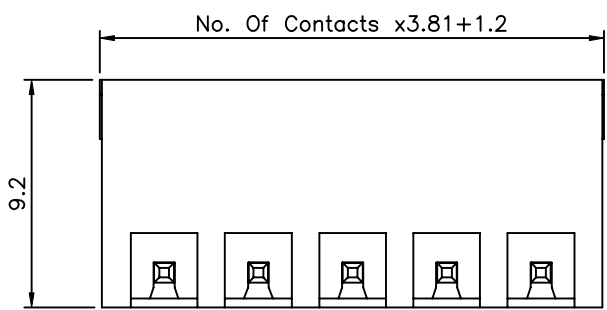

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 07551

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY HYY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 ANG. $\pm 1^\circ$

SCALE NONE

REV. A0

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	04/10/2009