


Specification

- General Information:
 - Contact Principle: Friction Technology
 - Mounting Type: SMT
 - Durability: 10,000 Cycles Min.
 - Material:
 - Data Contact: Copper Alloy
 - Insulator: Thermoplastic, UL 94V-0
 - Shell : Brass, Nickel Plated
 - Plating: Gold Over Nickel
 - Electrical Specification
 - Contact Resistance: 50 Milliohms Max .
 - Insulator Resistance: 1000 Megohms Min.
 - Environmental Specification
 - Operating Temperature: -40°C ~ +85°C
 - Humidity: 10% ~ 95% RH
 - Storage Temperature: -40°C ~ +85°C
 - Storage Humidity: 10% ~ 95% RH
 - Resistance To Soldering Heat:
 - Vapor Phase: 215°C, 30 Sec. Max.
 - IR Re-Flow: 260°C, 15 Sec. Max.
 - Manual Soldering: 360°C, 3 Sec. Max.
- . RoHS compliant



P.C.B LAYOUT(Tolerance: ±0.05mm)

△Notes: Please Do Not Plan To Design Any P.C.B line On The Above Shadow Area, like ”

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.





DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
07590		VIVAN		TOLERANCES ARE					
		CHECKED BY		.X ±0.38					
		LYS		.XX ±0.25					
		DRAWING BY		ANG. ±1°		△ A1	MARKED △ WAS CHANGED	SJH	03/29/2014
		SJH		UNIT		△ A0	NEW RELEASE	XSH	01/04/2006
SCALE	NONE	REV.	A1	mm		NO. REV.	REVISIONS	CHK	DATE

SPECIFICATIONS:

Reel Size: 330*32.5 mm

QTY: 625Pcs/Reel

RoHS Compliant

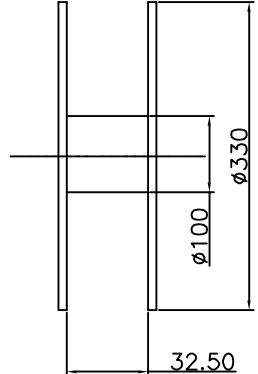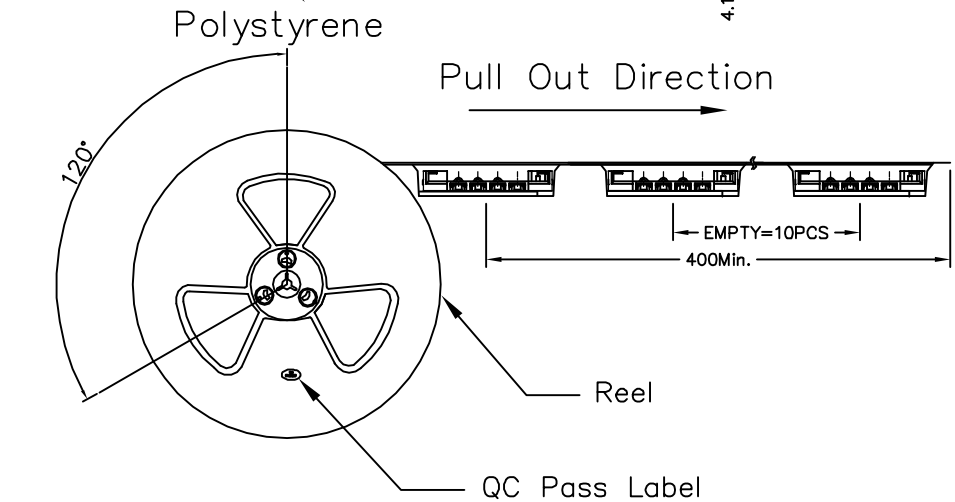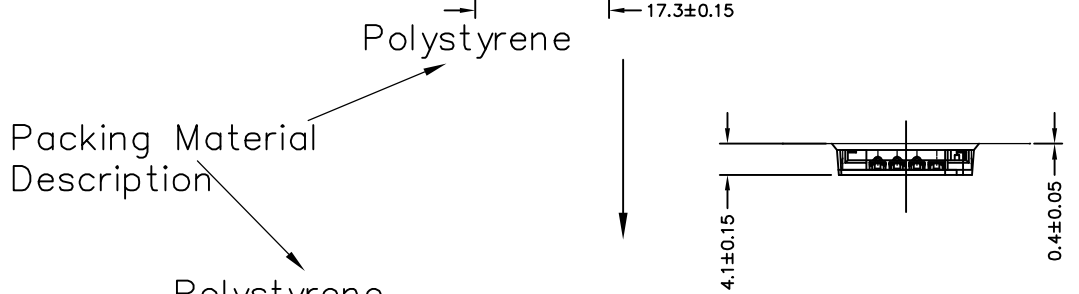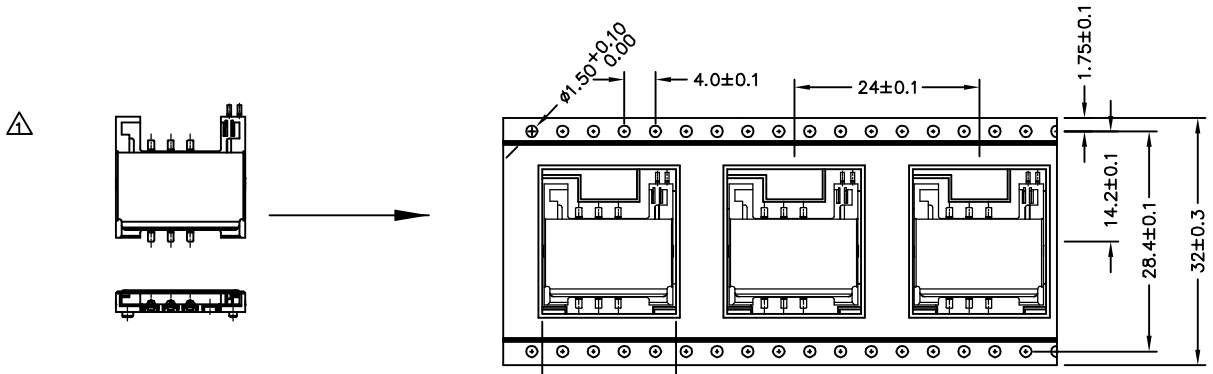

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07590

APPROVED BY

VIVIAN

CHECKED BY

LYS

DRAWING BY

SJH

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38
.XX ±0.25
ANG. ±1°

SCALE


NONE

REV.

A1

UNIT

mm



△ A1

MARKED △ WAS CHANGED

SJH

03/29/2014

△ A0

NEW RELEASE

XSH

07/18/2007

NO. REV.

REVISIONS

CHK

DATE