
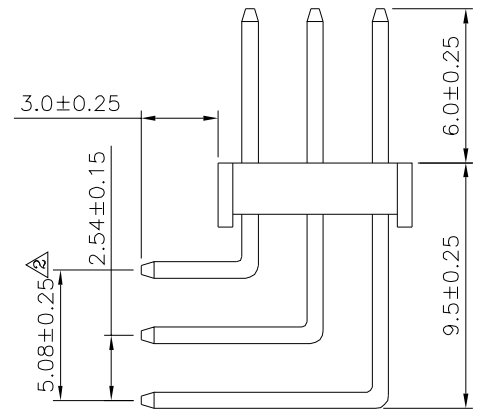
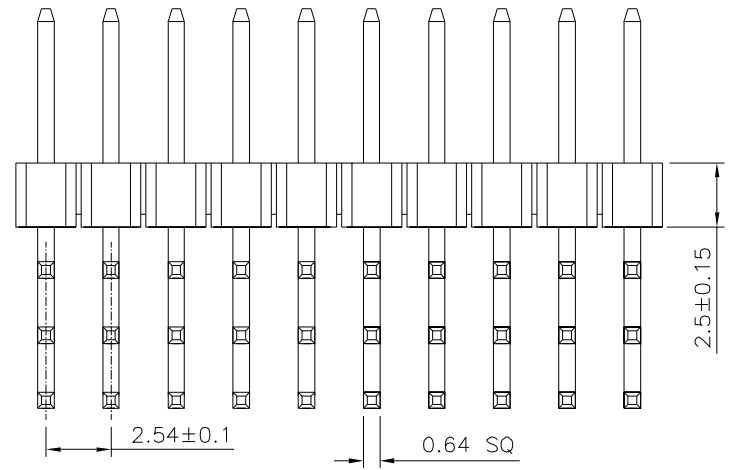


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

SPECIFICATION
 Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

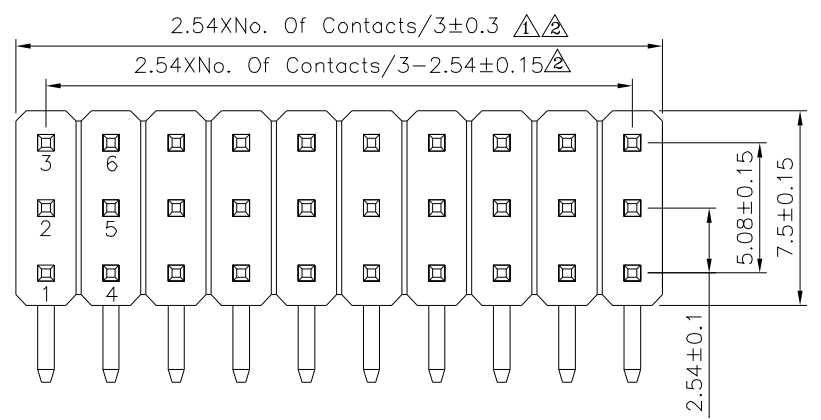

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*
07594		MEI		
		CHECKED BY	HZF	
SCALE		REV.		UNIT
NONE		A3		mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	10/20/2023
2	A2	Modify Data	HZF	01/12/2022
1	A1	Modify Data	HZF	02/08/2017
0	A0	NEW RELEASE	HZF	08/09/2014