


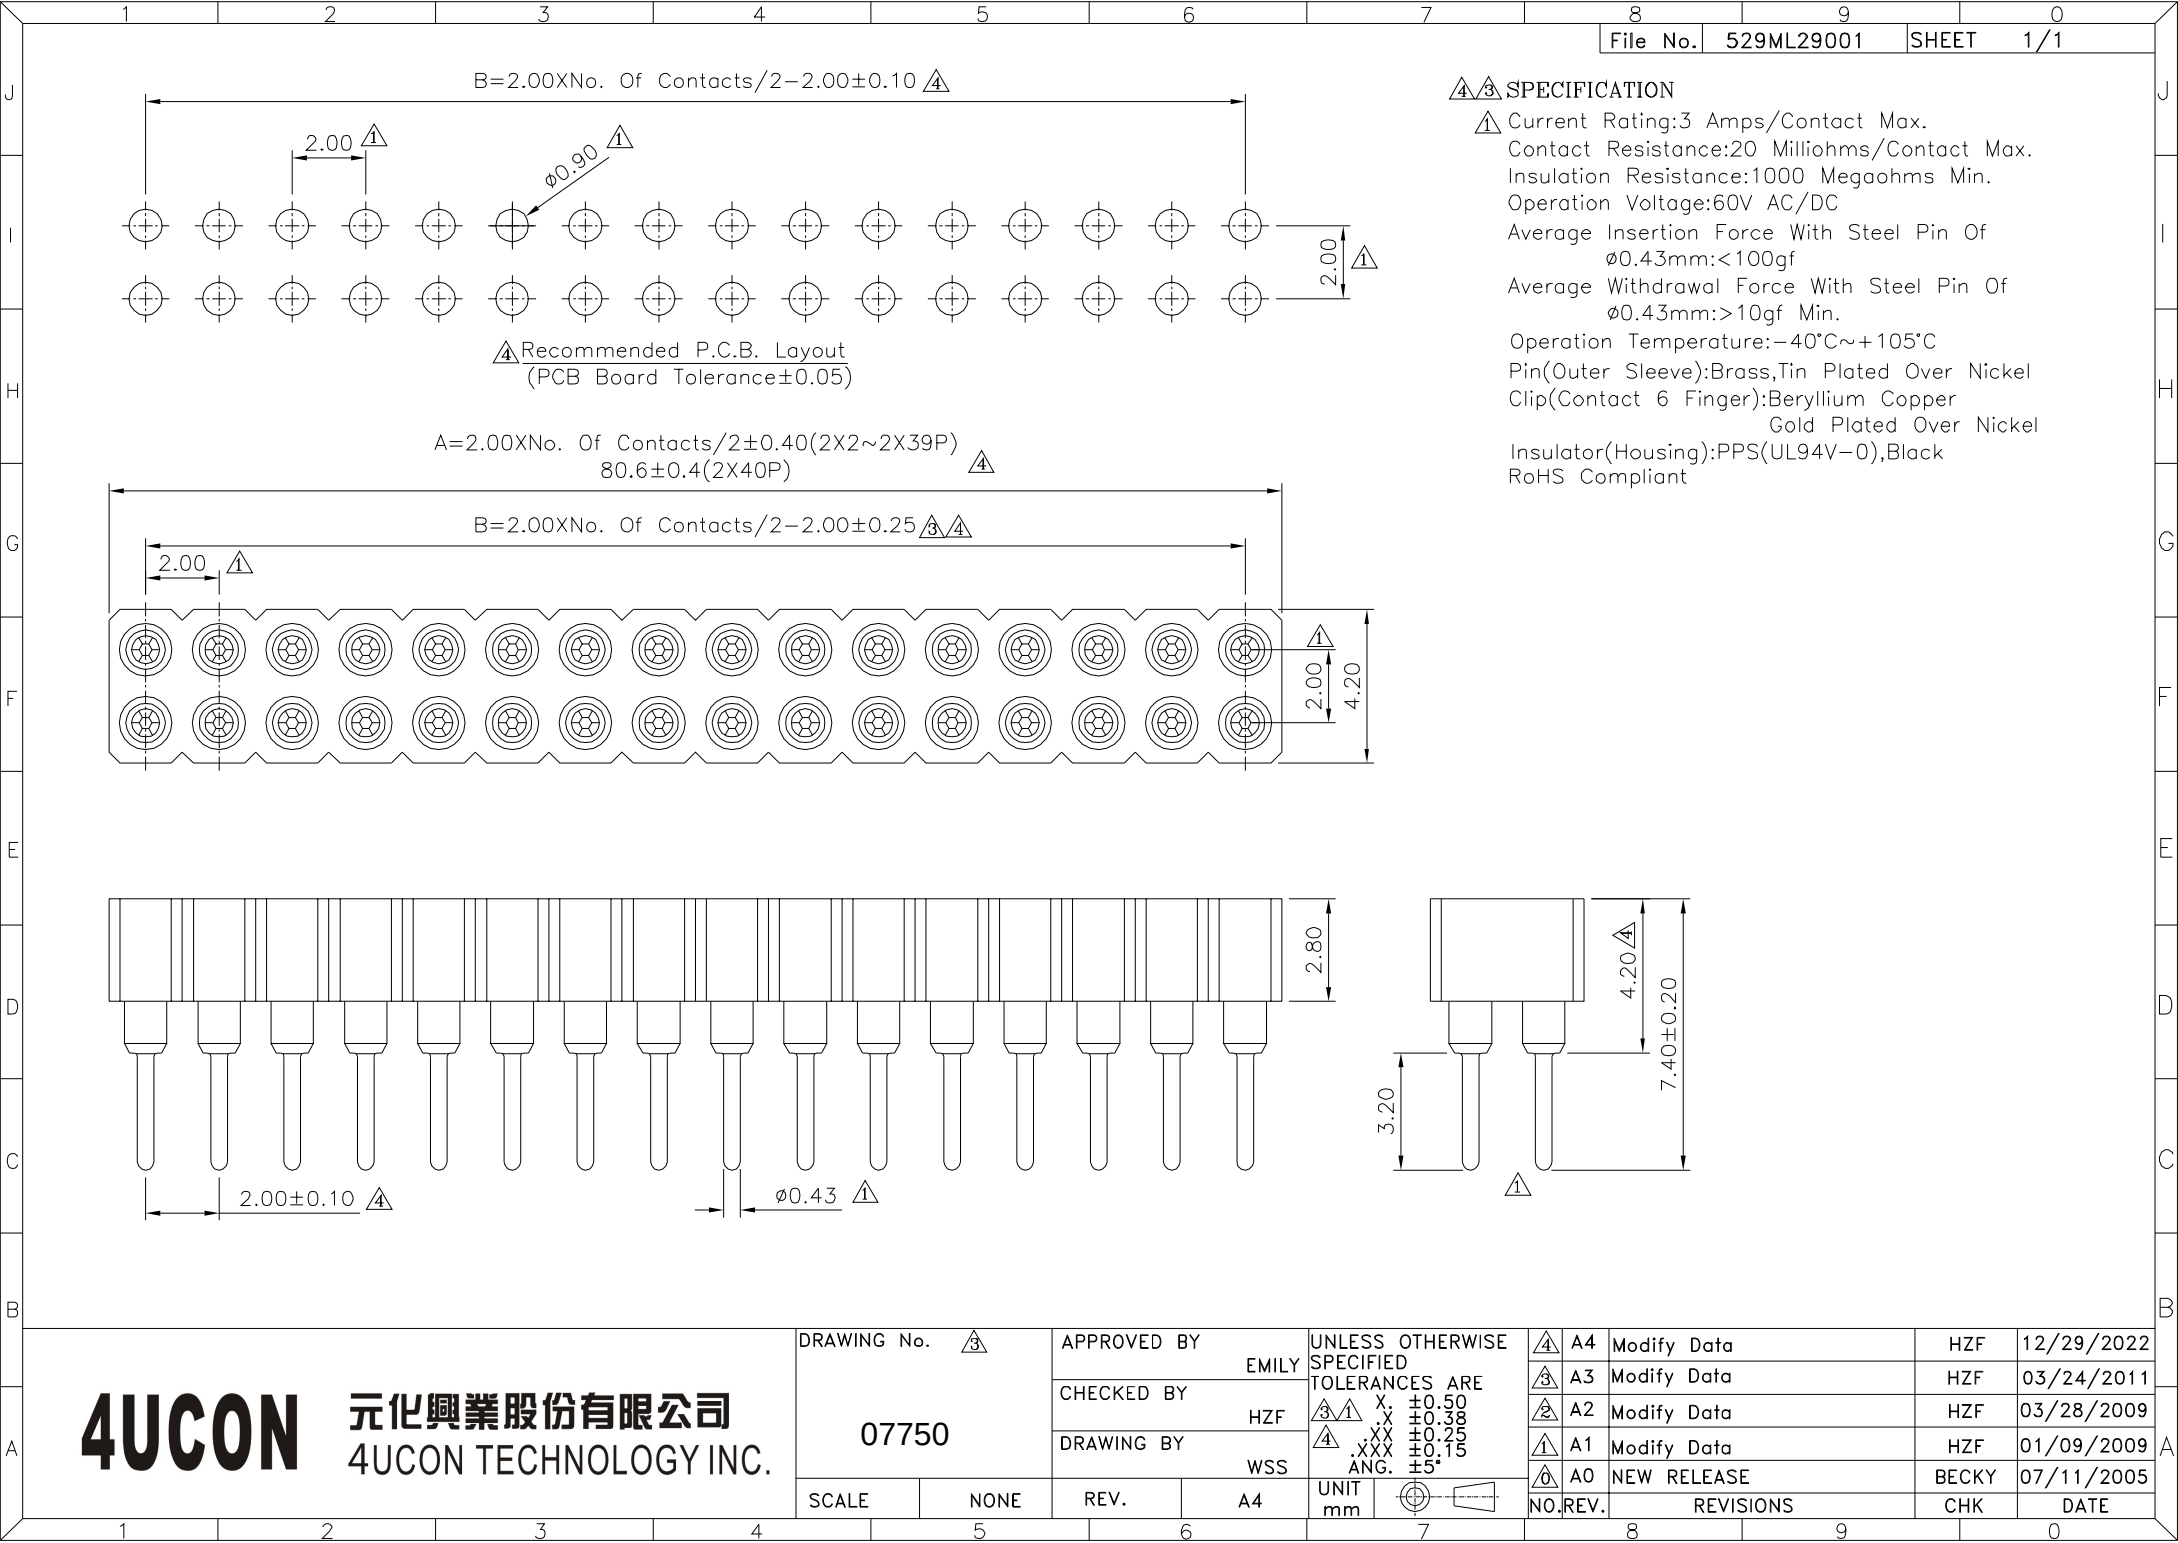

△△ SPECIFICATION

△ Current Rating:3 Amps/Contact Max.
Contact Resistance:20 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min.
Operation Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
ø0.43mm:<100gf
Average Withdrawal Force With Steel Pin Of
ø0.43mm:>10gf Min.
Operation Temperature:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 6 Finger):Beryllium Copper
Gold Plated Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △ 07750		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ △ X ±0.50 △ △ X ±0.38 △ △ X ±0.25 △ △ X ±0.15 ANG. ±5°	△ A4	Modify Data	HZF	12/29/2022	
		EMILY			△ A3	Modify Data	HZF	03/24/2011	
		CHECKED BY			△ A2	Modify Data	HZF	03/28/2009	
		HZF			△ A1	Modify Data	HZF	01/09/2009	
		DRAWING BY			△ A0	NEW RELEASE	BECKY	07/11/2005	
		WSS							
SCALE	NONE	REV.	A4	UNIT mm		NO. REV.	REVISIONS	CHK	DATE