
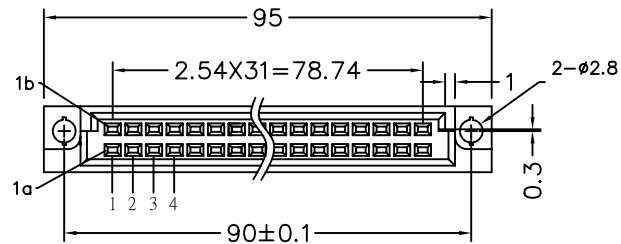


P.C.Board Layout

SPECIFICATIONS

Current Rating : 2AMP

Dielectric Withstanding Voltage : AC 1000V For 1 Minute

Insulator Resistance : 1000M Ohms Min At DC 500V

Contact Resistance : 30m Ohms Max At DC 100mA

Operating Temperature : -55°C to +105°C

Housing : 30% Glass Filled PBT UL94V-0

Contacts : Phosphor Bronze

	x length	1	2	W1	W2
		4.6	6.3	13	17
Pitch	position	Rows with Contacts		Contact Arrange	
2.54mm	32	a b		b □ □ □ □ a □ □ □ □	
	16	a -		b □ □ □ □ a □ □ □ □	
5.08mm	16	a b		b □ □ □ □ a □ □ □ □	
	8	a -		b □ □ □ □ a □ □ □ □	

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07798

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF


UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

UNIT
mm

SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE