
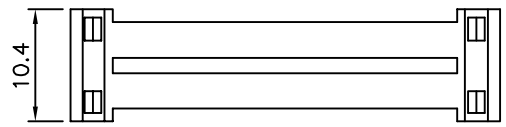
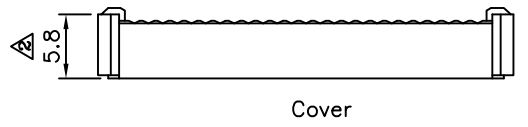
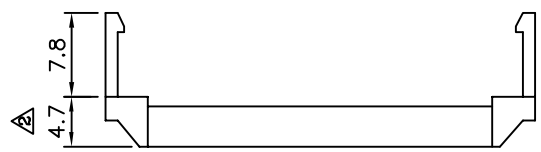
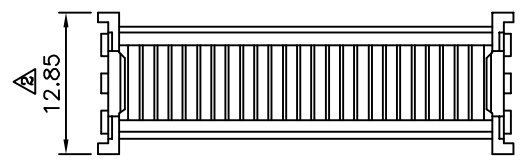



△ SPECIFICATION
 Current Rating: 3 Amp
 Voltage Rating: 250V AC/RMS 60 Hz
 Dielectric Withstanding Voltage:
 1000V AC/RMS 60 Hz For 1 Minute
 Contact Resistance: 20 Milliohms Max. At 1 Amp DC
 Insulation Resistance: 1000 Megaohms Min. At 500V DC
 Insulator: PBT+G.F.(UL94V-0), Black
 Contact: Brass, Selective Gold Flash Over Nickel
 Shell: Steel, Tin Plated Over Copper
 RoHS Compliant

△ (1)

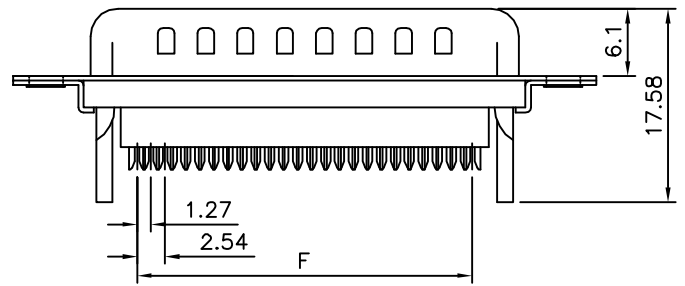

Pos.	A	B	C	E	F
09	30.81	24.99	16.92	11.08	10.16
15	39.20	33.30	25.25	19.39	17.78
25	53.05	47.04	38.96	33.24	30.48
37	69.40	63.50	55.42	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 07855
 APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HTP
 SCALE NONE REV. A2
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
 X. ±0.38 X.* ±3*
 .X ±0.25 .X.* ±1*
 .XX ±0.13
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	04/11/2012
△ A1		Modify Data	SHIN	02/26/2007
△ A0		NEW RELEASE		