


SPECIFICATIONS
 Current Rating:5AMP
 Dielectric Withstanding Voltage:
 AC 1000V For 1 Minute
 Contact Resistance:30 Milliohms At DC 100mA
 Insulator Resistance:1000Megohms Min.At DC 500V
 Operating Temperature:-55°C To +235°C
 Contact:Phosphor Bronze
 Housing:Nylon 6T


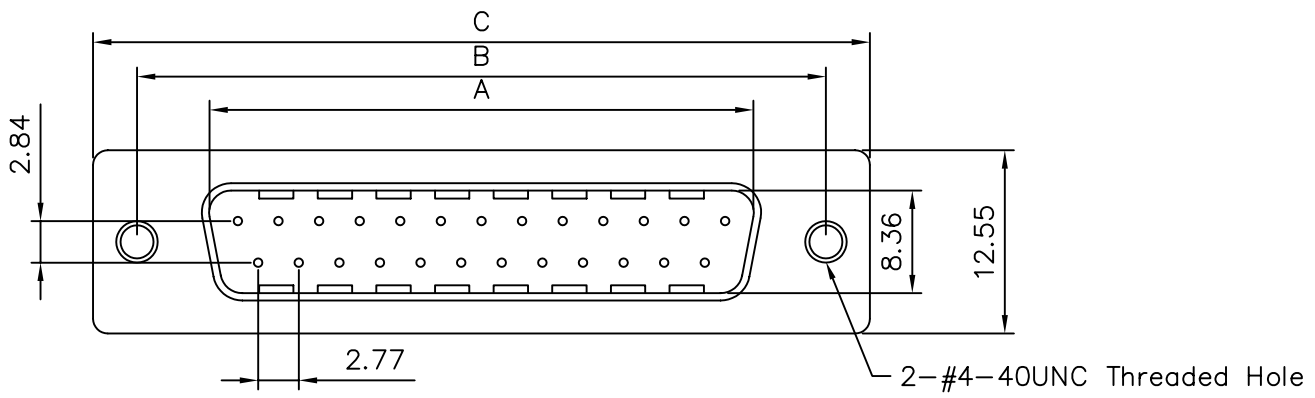


Terminal Specification

Drilled Hole	1.1±0.2
Finished Hole	1.0±0.05
Cu	Min 25um
Sn	5-15um

Boardlock Specification

Drilled Hole	3.2±0.02
Finished Hole	3.1±0.05
Cu	Min 25um
Sn	5-15um

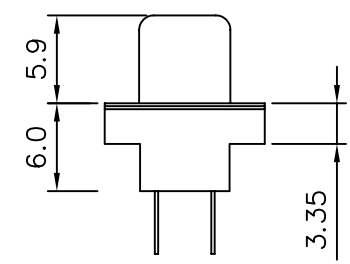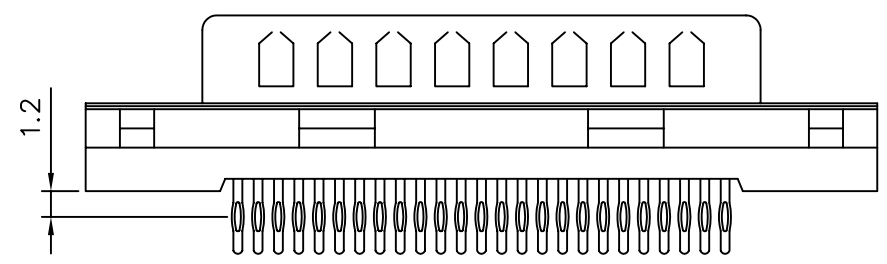

Positions	A	B	C
09	16.92	24.99	30.81
15	25.50	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 07932

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.10
 .XXX ±0.05

SCALE NONE REV. A

UNIT mm
 NO. REV. A NEW RELEASE REVISIONS RAN DATE