
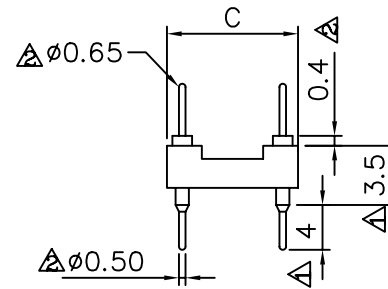
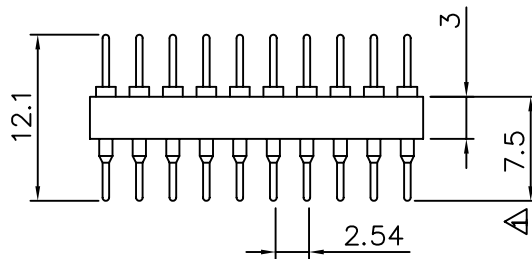


**SPECIFICATIONS:**

Dielectric Withstanding : 600V RMS.  
 Contact Resistance: 100 Milliohms Max.  
 Insulation Resistance : 5000 Megohms Min.  
 Temperature : -55°C To +125°C  
 Insertion Force : Average 500 GR  
 Extraction Test : Average 159 GR  
 Resist To Soldering Heat: Max. 260°C, 5 Sec.  
 Contact: Copper Alloy, Gold Flash  
 Insulator: Grass Filled Polyester, UL94V-0  
 Sleeve: Brass, 10 Micro Inch Gold Plating Or  
 200 Micro Inch Tin Plating

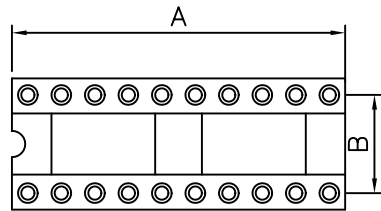

Position	A	B	C
06	7.62	7.62	10.16
08	10.16	7.62	10.16
10	12.70	7.62	10.16
14	17.78	7.62	10.16
16	20.32	7.62	10.16
18	22.86	7.62	10.16
20	25.40	7.62	10.16
22	27.94	7.62	10.16
24	30.48	7.62	10.16
28	35.56	7.62	10.16

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 08209

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.2  
 .XX ±0.15  
 ANG.

SCALE NONE

REV. A1

UNIT mm

NO.

REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
A1		ADD DIM.	MEI	2004/05/05
A1		MODIFY DIM.	MEI	2004/05/05
A0		NEW RELEASE	MEI	