
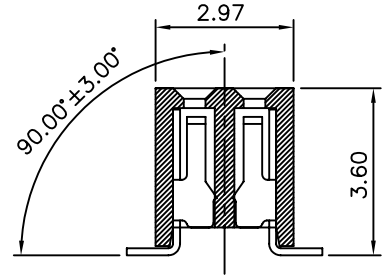
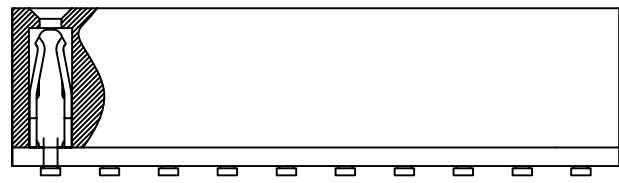
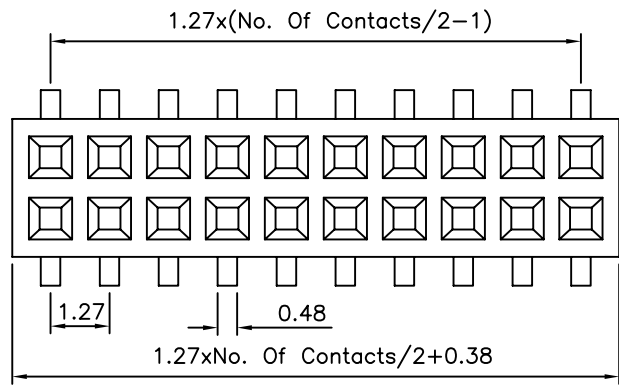


**SPECIFICATIONS**  
 Current Rating:1 Amp  
 Insulator Resistance:5000 Megohms Min.  
 Dielectric Withstanding:AC 500V  
 Operating Temperature:-40°C~+105°C  
 Max. Processing Temp.:230°C For 30~60 Seconds  
 (260°C For 10 Seconds)  
 Contact:Phosphor Bronze  
 Housing:LCP(UL 94V-0)

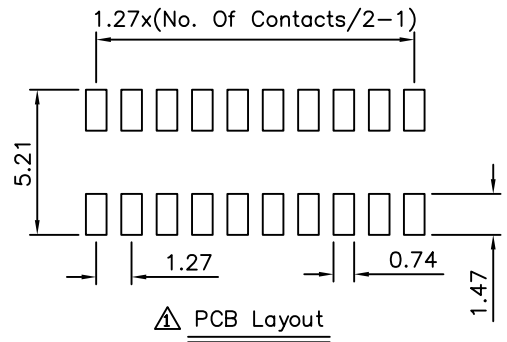

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
08315		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.15					
		BECKY		.XX ±0.10					
		DRAWING BY		.XXX ±0.05		△ A1	Modify PCB Layout	BECKY	04/11/2006
		HZF				△ A0	NEW RELEASE	BECKY	04/06/2005
SCALE	NONE	REV.	A1	UNIT	mm	NO.REV.	REVISIONS	CHK	DATE