
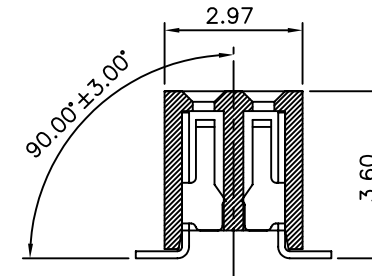
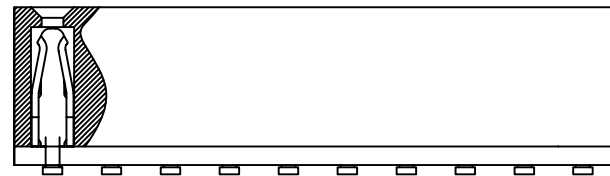
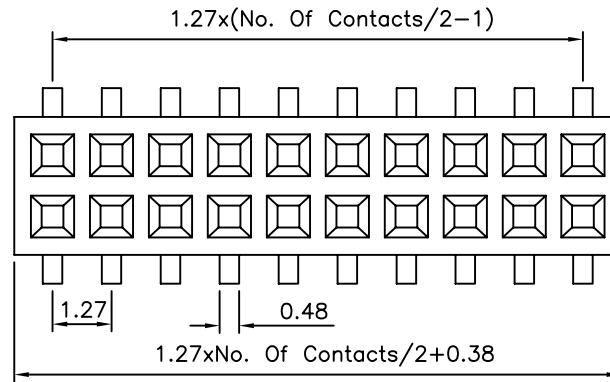


SPECIFICATIONS

Current Rating:1 Amp
 Insulator Resistance:5000 Megohms Min.
 Dielectric Withstanding:AC 500V
 Operating Temperature:-40°C~+105°C
 Max. Processing Temp.:230°C For 30~60 Seconds
 (260°C For 10 Seconds)
 Contact:Phosphor Bronze
 Housing:LCP(UL 94V-0)

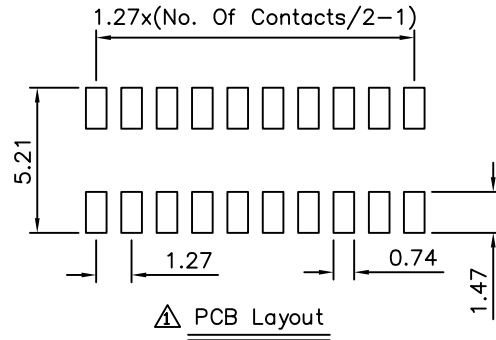

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 08341

APPROVED BY
 MEI
 CHECKED BY
 BECKY
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.15
 .XX ±0.10
 .XXX ±0.05

SCALE NONE

REV. A1

UNIT mm

NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify PCB Layout	BECKY	04/11/2006
△ A0	NEW RELEASE	BECKY	04/06/2005