
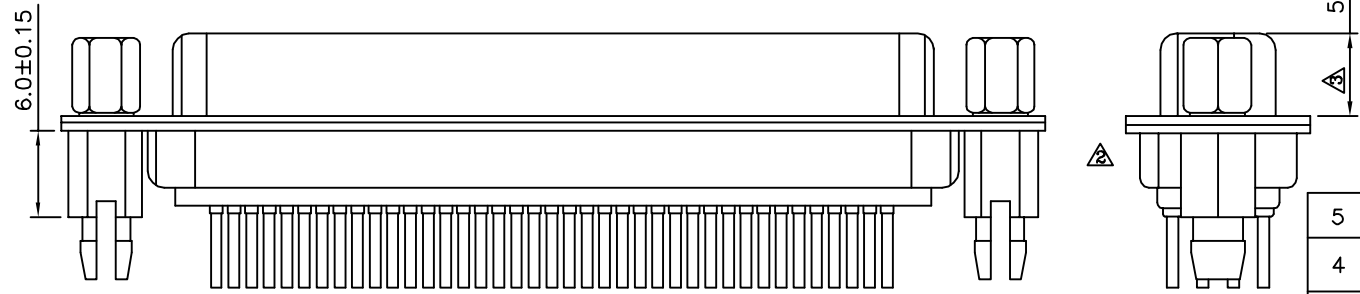


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:1A Max.
 Dielectric Withstanding Voltage:500V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megohms Min. At DC 500V
 Temperature Range:-55°C~+105°C
 Total Mating Force:10.0 Kgf Max.
 Total Unmating Force:6.0 Kgf Min.
 RoHS Compliant

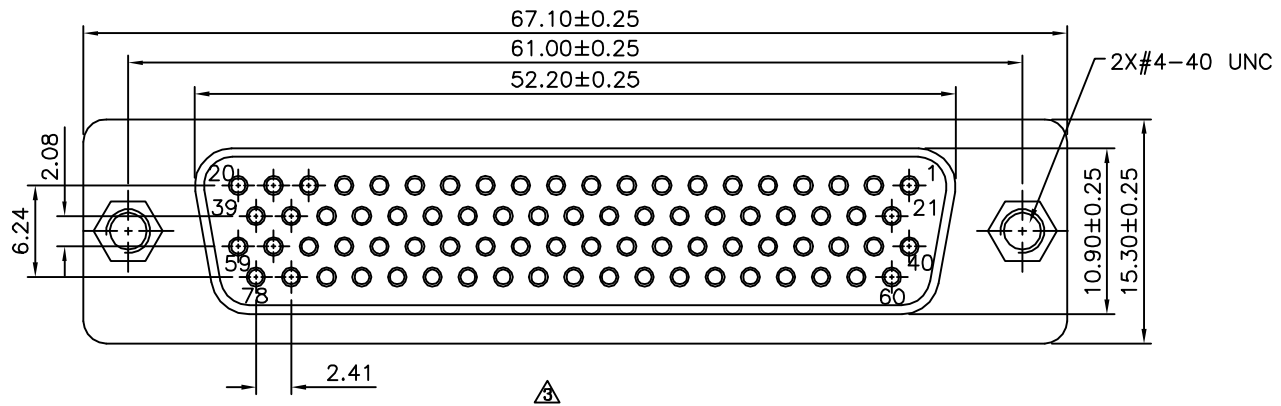

No.	Name	Q'ty	Material	Remark
5	Hex Screw (H5X10)	2	Brass	Nickel Plated
4	Boardlock Nut (H4.75X11.5)	2	Brass	Nickel Plated
3	Shell	1	Cold Rolled Steel	Tin Plated
2	Contact	78	Brass	Gold Flash Over Nickel
1	Housing	2	PBT,UL94V-0	White

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.20 .XXX ±0.100 ANG. ±1°
08372		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A3	

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	03/28/2014
△A2		Add Dim. 16	SHIN	10/24/2006
△A1		Modify Data	BECKY	03/31/2005
△A0		NEW RELEASE		